
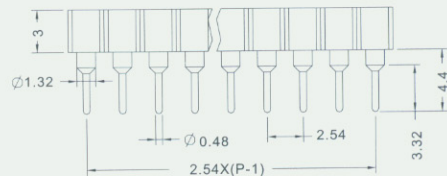


131 series

SIP SOCKET(SCREW PIN)2.54mm

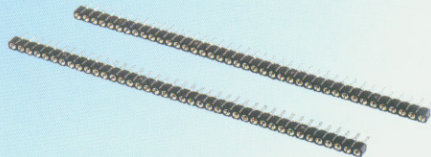

Material and Finish:

Insulator: Glass Filled Thermoplastic PPS UL 94V-0

Contact: (BeCu), Beryllium Copper

Finishes: Outer Shield: Tin Plated

Inner Contact: Gold Plated

Performance Characteristics:

Voltage Rating: AC 250V

Current Rating: 1AMP

Withstanding Voltage: 1000V AC For 1Minute

Contact Resistance: 15 Milliohms Max

Insulator Resistance: 1000 Megohms Min

Operating Temperature: -55° C--+105° C

Contact Style: Four-Fingered Inner Contact

How To Order

131 - S 40 05

SERIES NO

1

2

3

4

ROW TYPE:
S-SINGLE ROW
(1-40 PINS)

INNER CONTACT GOLD PLATED:

05-5u"

10-10u"

20-20u"

30-30u"

NO.OF PINS

