


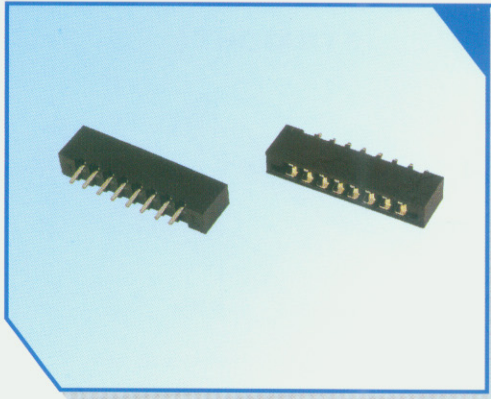

120 series

FPC CONNECTOR 2.54mm(0.100")

Position	A	B	Position	A	B
8	17.78	25.26	25	60.96	68.44
9	20.32	27.80	26	63.50	70.98
10	22.86	30.34	27	66.04	73.52
11	25.40	32.88	28	68.58	76.06
12	27.94	35.42	29	71.12	78.60
13	30.48	37.96	30	73.66	81.14
14	33.02	40.50	31	76.20	83.68
15	35.56	43.04	32	78.74	86.22
16	38.10	45.58	33	81.28	88.76
17	40.64	48.12	34	83.82	91.30
18	43.18	50.66	35	86.36	93.84
19	45.72	53.20	36	88.90	96.38
20	48.26	55.74	37	91.44	98.92
21	50.80	58.28	38	93.98	101.46
22	53.34	60.82	39	96.52	104.00
23	55.88	63.36	40	99.06	106.54
24	58.42	65.90			

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

120 -34 T K
 SERIES NO 1 2 3 4
 NO.OF PINS: 8 TO 40
 CONTACT PLATED:
 G-ALL GOLD PLATED
 T-TIN PLATED
 COLOR:K-BLACK
 G-GRAY

