



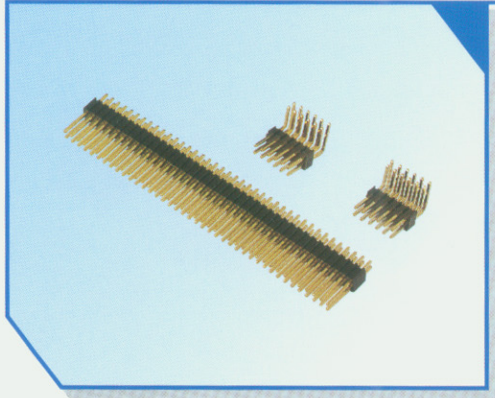

112-B series

PIN HEADER 1.27mm(0.050")

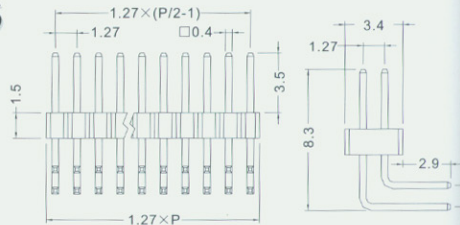

Specifications:

Current Rating: 1AMP

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Voltage: AC 500V For 1 minute

Operating Temperature: -55° C--+105° C

Material:

Contact: Phosphor Bronze

Housing: Nylon-6T&30% Glass Fible (UL94V-0)

How To Order

112-B - S S 40 G 100

- | | | | | | | | |
|--------------------|---|---|---|---|---|---|-------------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | |
| SERIES NO | | | | | | | PLASTICS HEIGHT: |
| | | | | | | | 100-1.00mm |
| | | | | | | | 150-1.50mm |
| | | | | | | | 160-1.60mm |
| | | | | | | | 200-2.00mm |
| | | | | | | | 254-2.54mm |
| ROW TYPE: | | | | | | | |
| D-DOUBLE ROW | | | | | | | |
| S-SINGLE ROW | | | | | | | |
| TERMINAL TYPE: | | | | | | | CONTACT PLATED: |
| S-STRAIGHT TYPE | | | | | | | T-ALL TIN PLATED |
| R-RIGHT ANGLE TYPE | | | | | | | G-ALL GOLD PLATED |
| | | | | | | | NO.OF PINS: |
| | | | | | | | 2 TO 100 |

