
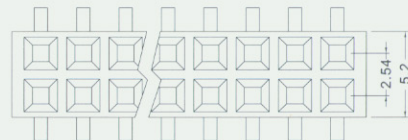


114-B series

**P.C.B SOCKET BOTTOM ENTRY
TYPE 2.54mm(0.100")**

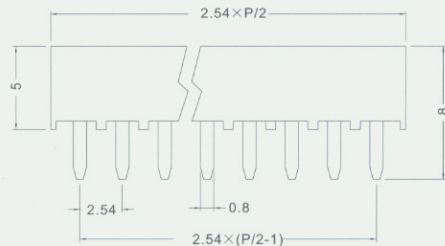

Specifications:

Current Rating: 1AMP

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Voltage: AC 500V For 1 minute

Operating Temperature: -55° C--+105° C

Material:

Contact: Phosphor Bronze

Housing: LCP&30% Glass Fible (UL94V-0)

How To Order

114-B - 40 G

1

2

3

SERIES NO

CONTACT PLATED:

T-ALL TIN PLATED

G-ALL GOLD PLATED

NO.OF PINS: 2 TO 40

