


DS1004 SERIES

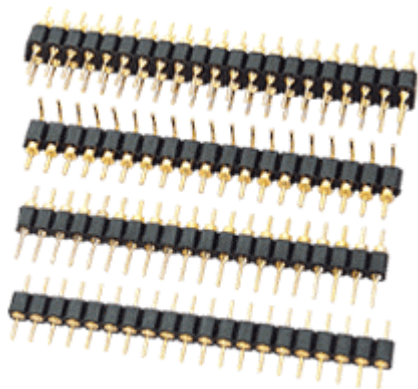

MATERIAL

Insulator:Thermoplastic {UL 94V-0}

Contact:Copper Alloy

Contact Plated:See ordering information

SPECIFICATION

Storage Temperature:-20-70℃


Operating Temperature:0-85℃

Contact Resistance:20m Ω max.(initial)

Insulation Resistance:1,000M Ω min

Dielectric Withstanding

Voltage:AC1,000V per minute

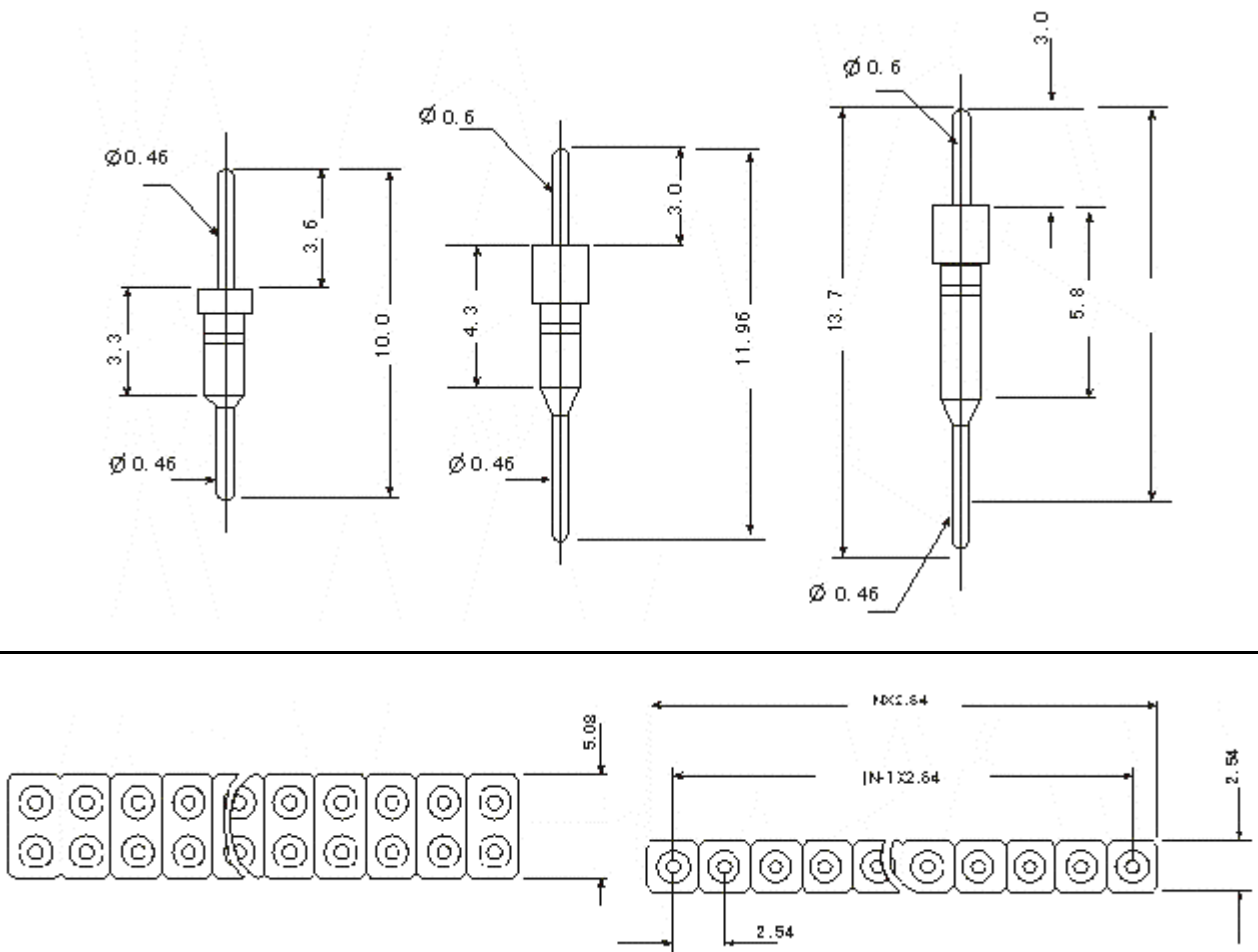

Ordering Information

Series No.
DS1004

No. of
Contacts
1
1 Single row(02-40)
2 Dual row(04-80)

Mounting
Type
S
S: Straight
R: Right angle

Contact Plating
F1
F1: Gold Flash
(Please contact us for
other plating thickness)