

DS1006 SERIES




MATERIAL

Pin(Outer sleeve):Brass,machined,CuZn38Pb2
Clip(contact4/6 finger):Beryllium
Copper,heat treated
Plating(Outer sleeve):
Tin plated:2μm/80μ"
Nickel,5μm/200μ"
Gold plated:2μm/80μ"
nickel,full gold

Electrical

Current rating:3Amps/contact max.
Contact resistance:<4mΩ/contact

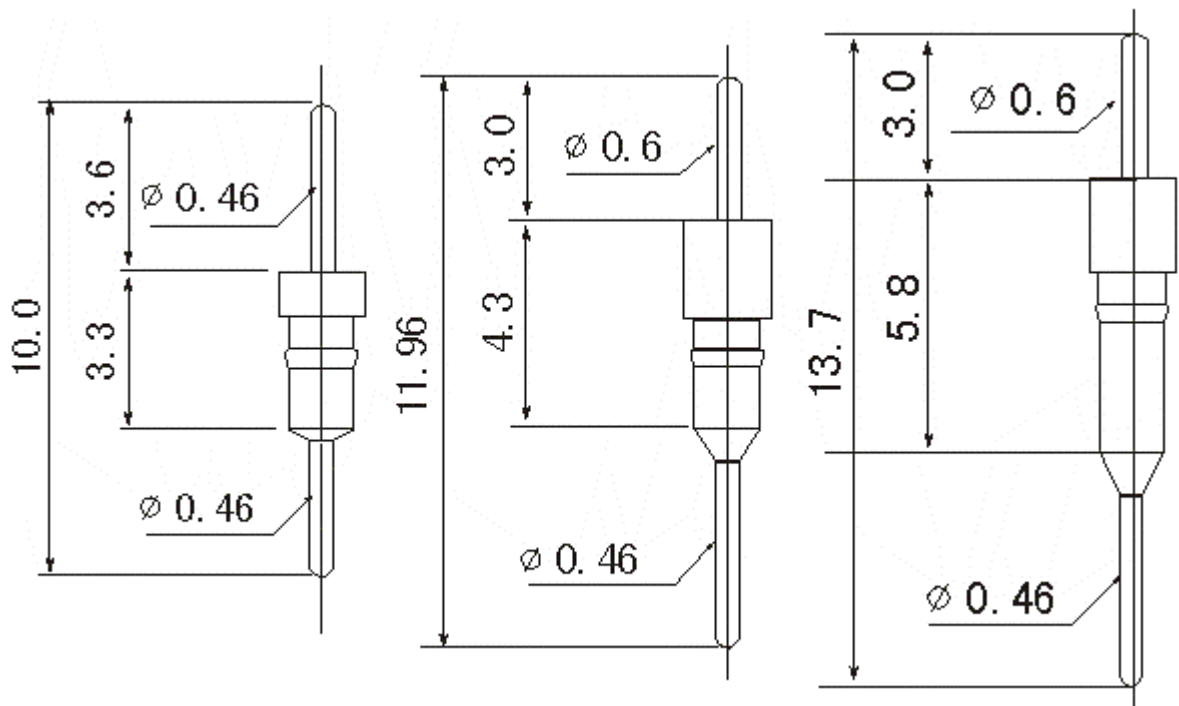

Ordering Information

Series No.
D61 006

1 Pin plated
1
0 Tin 200 μ"
1 Gold flash
2 Gold 10 μ"
3 Gold 30 μ"

2 Pin length
0
0 10.00mm
1 11.96mm
2 13.70mm
Additional terminal types available