


DS1008 SERIES

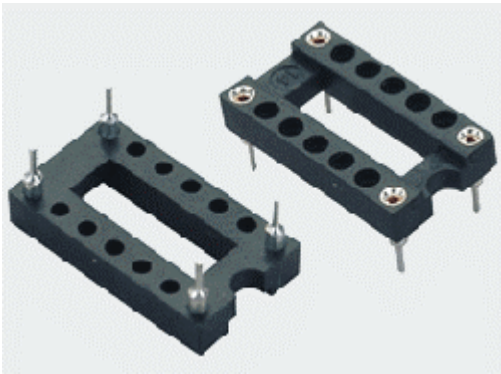

MATERIAL

Insulator:Thermoplastic {UL
94V-0}

Contact:Copper Alloy

Contact Plated:See ordering
information

SPECIFICATION

Storage Temperature:-20-70℃

Operating Temperature:0-85℃







Contact Resistance:20m Ω
max.(initial)


Insulation Resistance:1,000M Ω
min

Dielectric Withstanding

Voltage:AC1,000V per minute

0804

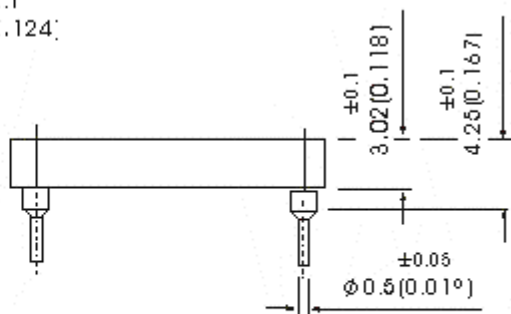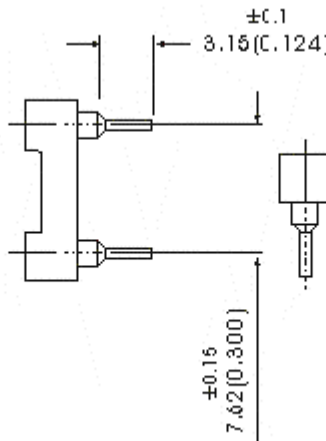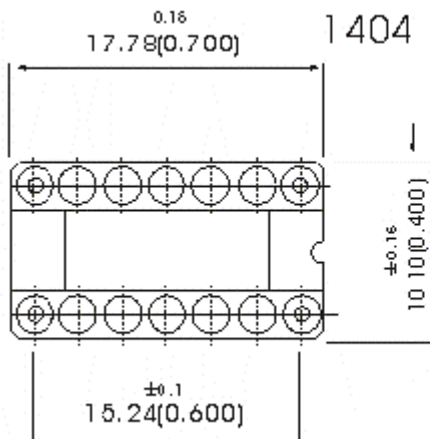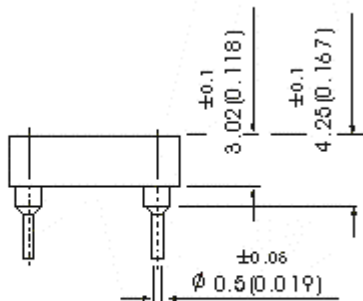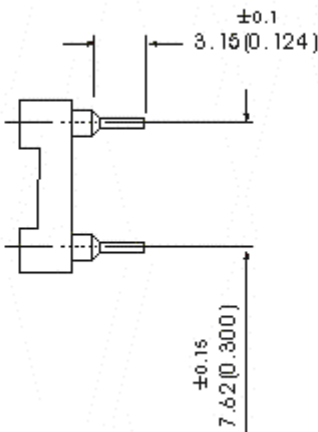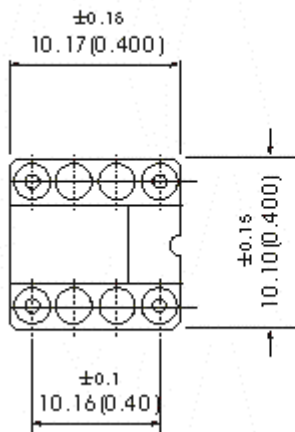

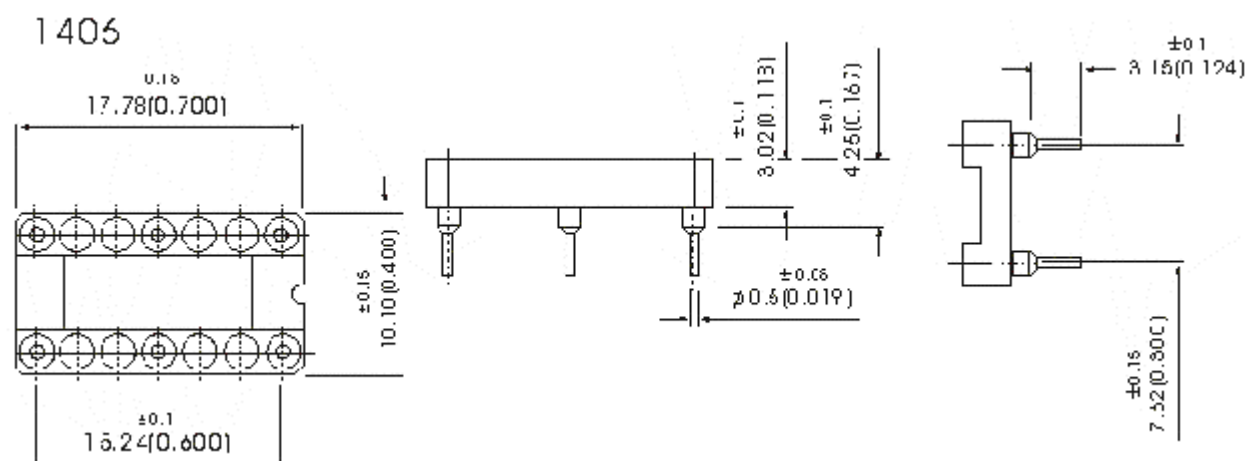

Ordering Information

Series No.

DS1008

No. of
Contacts

0804

0804: pins 1-4-5-8
1404: pins 1-7-8-14
1406: pins 1-4-7-8-11-14

Inner contact
gold plated

N

05-5 μ
10-10 μ
20-20 μ
30-30 μ