


DS1009 SERIES

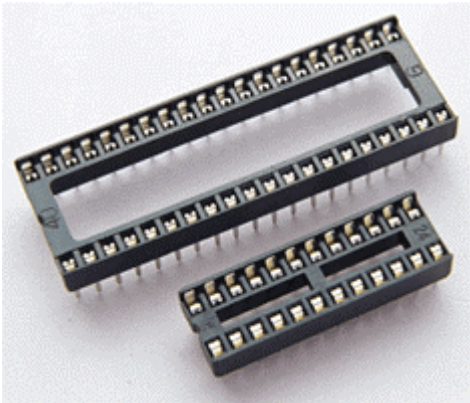

MATERIAL

Insulator:Thermoplastic {UL 94V-0}

Contact:Copper Alloy

Contact Plated:See ordering information

SPECIFICATION

Storage Temperature:-20-70℃




Operating Temperature:0-85℃

Contact Resistance:20mΩ
max.(initial)

Insulation Resistance:1,000MΩ
min




Dielectric Withstanding

Voltage:AC1,000V per minute

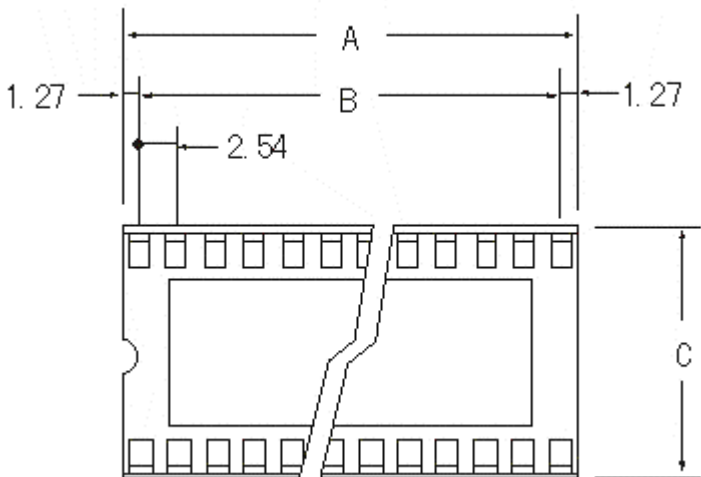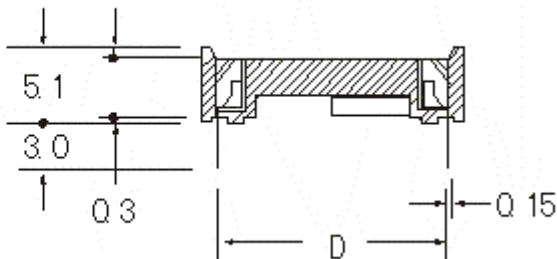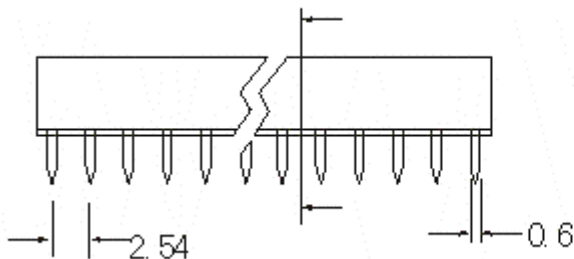

Position	Dimension			
	A	B	C	D
6	7.52	7.62	10.16	7.62
8	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.34	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	10.16	7.62
28	35.56	33.02	17.78	15.24
32	40.54	38.10	17.68	15.24
40	50.80	48.26	17.78	15.24
42	53.21	50.80	17.68	15.24
48	60.80	58.42	17.68	15.24
64	81.24	78.43	25.99	22.86

1405

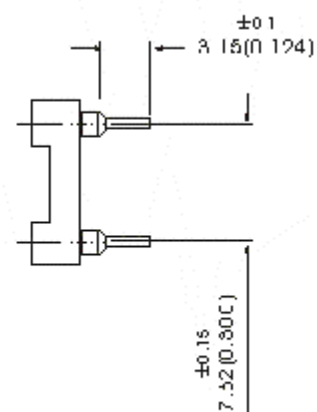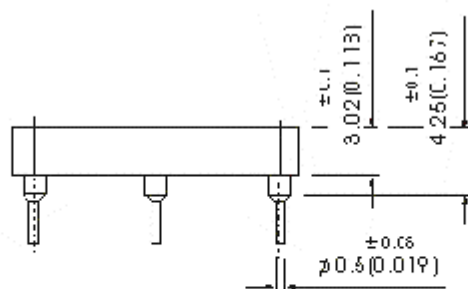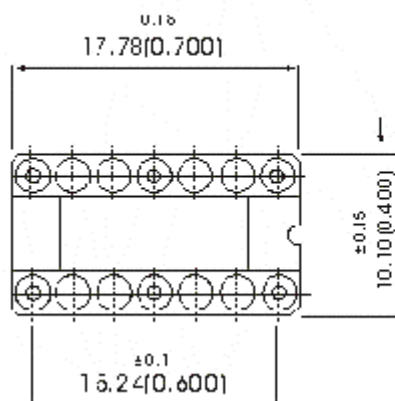

Ordering Information

Series No.	No. of Contacts	Contact Type	Contact Plating	Width
D61009	24	A	T1	W
	06 20 32 08 24 40 14 24 42 16 28 48 18 28 64	A: w/o Kink B: w/ Kink	T1 100 μ " Min Sn/Pb overall 50 μ " Ni underplate	N: 7.62mm(06~24P) W: 16.24mm(24~62p)