


DS1010 SERIES

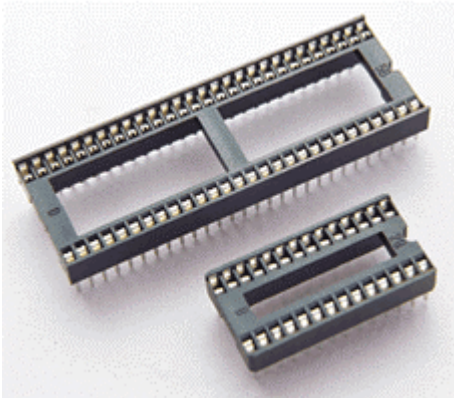

MATERIAL

Insulator:Thermoplastic {UL 94V-0}

Contact:Copper Alloy

Contact Plated:See ordering information

SPECIFICATION

Storage Temperature:-20-70℃


Operating Temperature:0-85℃

Contact Resistance:20m Ω max.(initial)

Insulation Resistance:1,000M Ω min

Dielectric Withstanding

Voltage:AC1,000V per minute

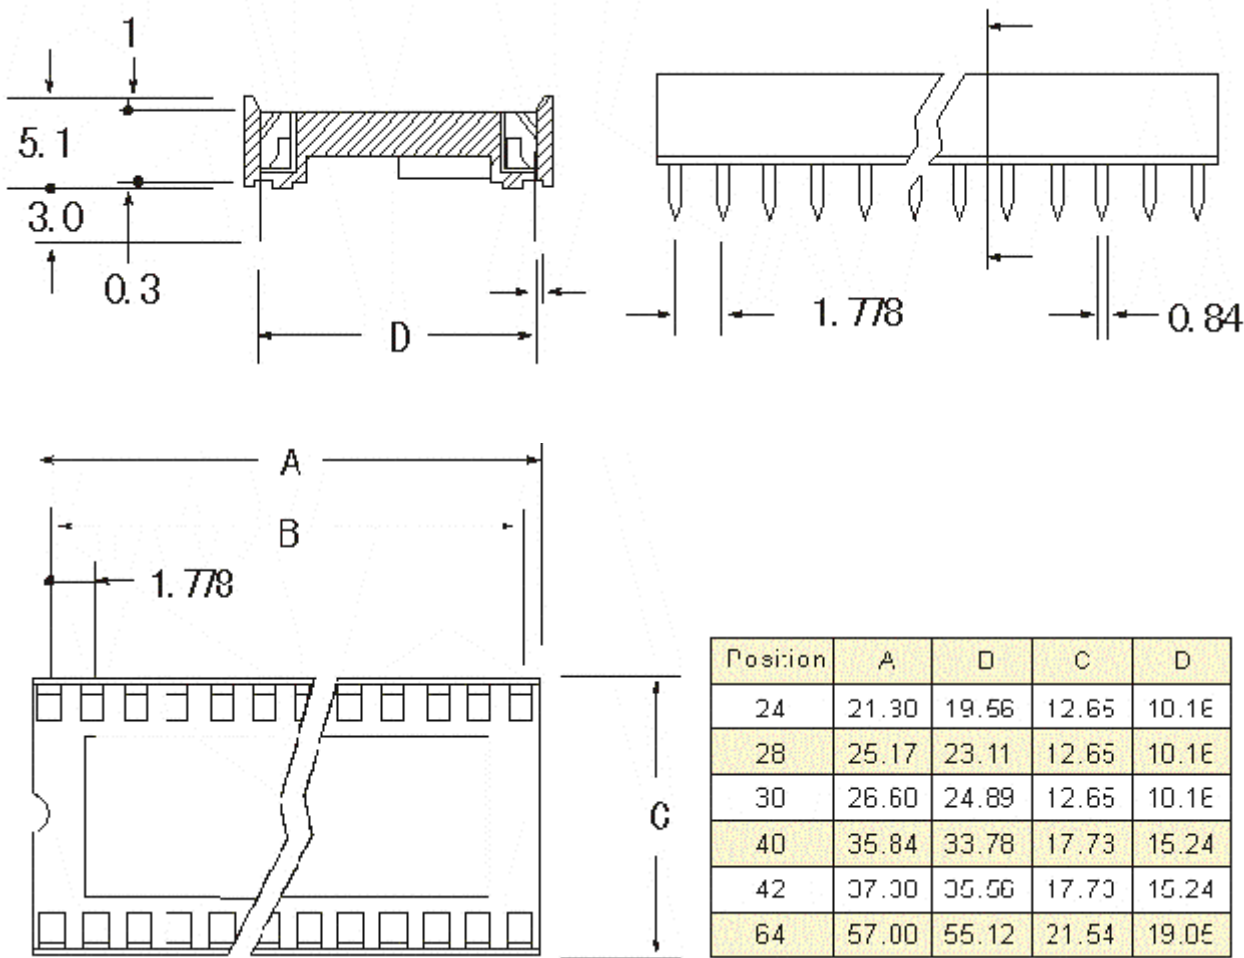

Ordering Information

Series No.	No.of Contacts	Contact Plating	Width	Central Support
DS1010	34	T1	W	S
	24 40 28 42 30 64	T1 100 μ " Min Sn/Pb overall 50 μ " Ni underplate	N:12.65mm (24~30) W:17.73mm(40~64)	S:w/Cintral Support X:w/o Central Support