


DS1011 SERIES

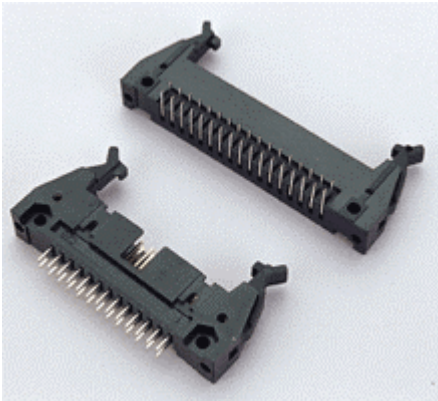


MATERIAL

Insulator:Thermoplastic {UL 94V-0}
Color:See ordering Information
Contact:Copper Alloy
Contact Plated:See ordering information

SPECIFICATION

Storage Temperature:-20-70℃
Operating Temperature:0-85℃
Contact Resistance:20m Ω max.(initial)
Insulation Resistance:1,000M Ω min
Dielectric Withstanding Voltage:AC1,000V per minute

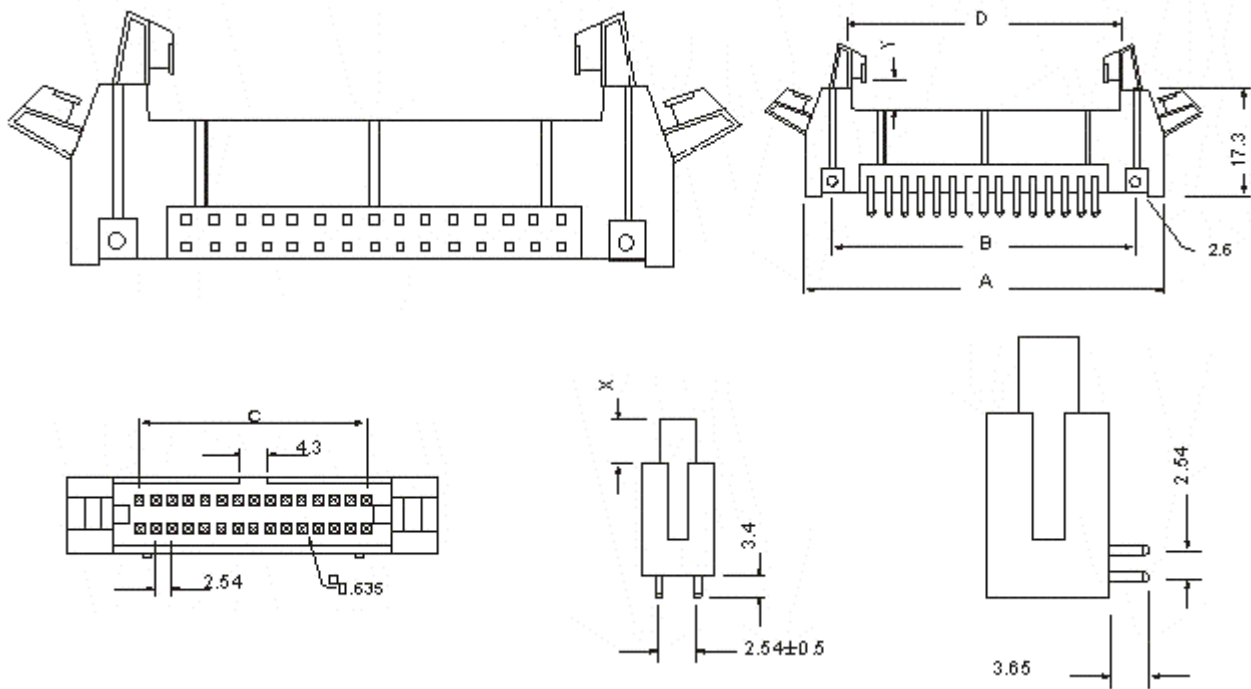

No. of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	32.0	37.08	39.62	44.70	52.32	57.40	62.48	70.10	82.80	95.50	100.58
B	21.84	26.92	29.46	34.54	42.16	47.24	52.32	59.94	72.64	85.34	90.42
C	10.16	15.24	17.78	22.86	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	17.96	23.04	25.58	30.33	38.28	43.36	48.44	56.06	68.76	81.46	86.54

Ordering Information

Series No.	No. of Contacts	Mounting Type	Ejector Type	Contact Plating	Housing Color
DS1011	34	S	L	S1	B
	10 26 50 14 30 60 16 34 64 20 40	S: Straight R: R/A	L: Long S: Short N: w/o	S1: Gold Flash (Please contact us for other plating thickness)	B: Black G: Gray