


DS1012 SERIES

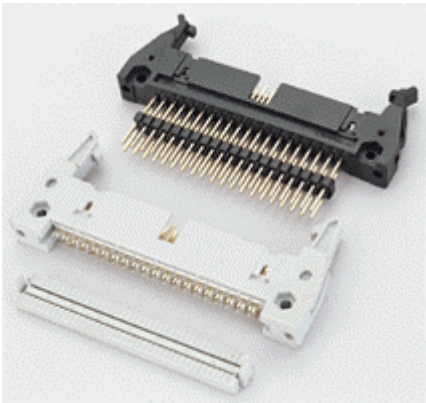



MATERIAL

Insulator:Thermoplastic {UL 94V-0}
Color:See ordering Information
Contact:Copper Alloy
Contact Plated:See ordering information

SPECIFICATION

Storage Temperature:-20-70℃
Operating Temperature:0-85℃
Contact Resistance:20m Ω max.(initial)
Insulation Resistance:1,000M Ω min
Dielectric Withstanding
Voltage:AC1,000V per minute

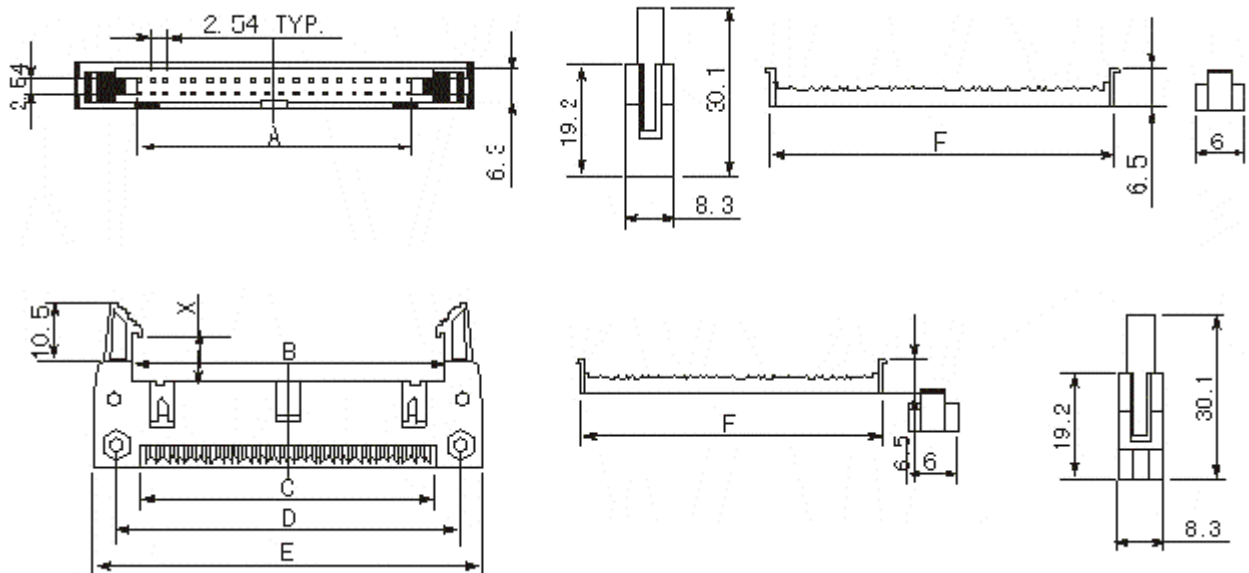

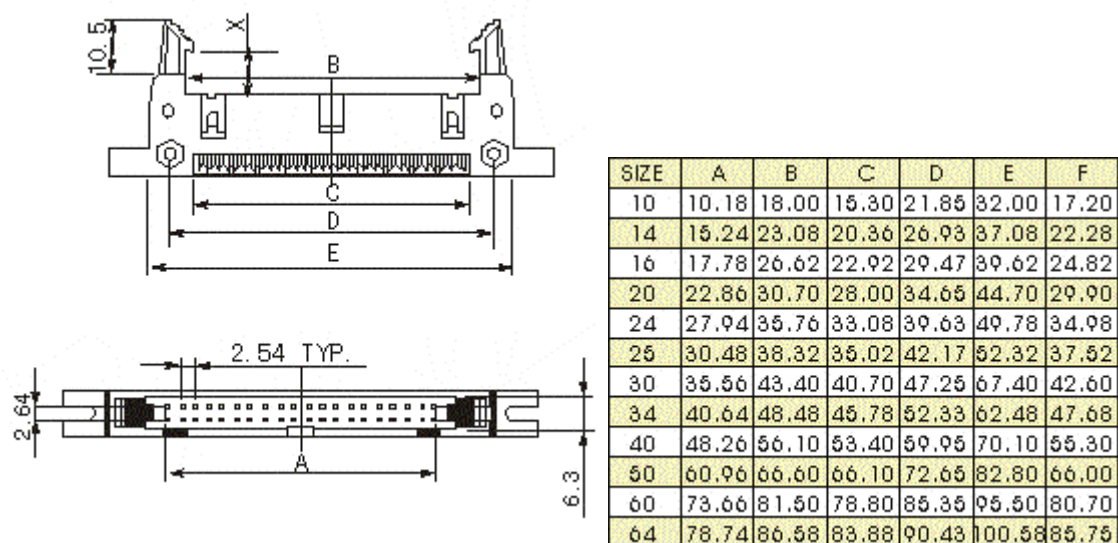

Ordering Information

Series No.
DS1012

No. of
Contacts
34

10 24 40
14 26 50
16 30 60
64

Ejector
Type
L

L: Long
S: Short
N: w/o

Screw
Hole
M

M: w/
N: w/o

Strain
Relief
N

M: w/
N: w/o

Contact Plating
S1

S1: Gold Flash

(Please contact us for
other plating thickness)

Housing
Color
G

G: Gray

Wieson
Logo
N

W: w/Logo
N: w/o Logo