


DS1015 SERIES







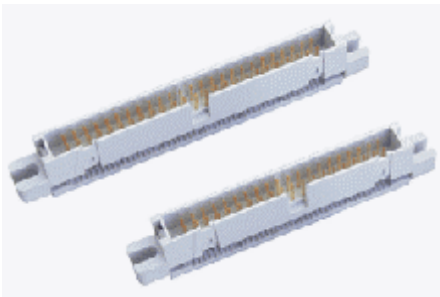


MATERIAL

Insulator:Thermoplastic {UL 94V-0}
Color:See ordering Information
Contact:Copper Alloy
Contact Plated:See ordering information
Shell:Copper Alloy

SPECIFICATION

Storage Temperature:-20-70℃
Operating Temperature:0-85℃
Contact Resistance:20m Ω max.(initial)
Insulation Resistance:1,000M Ω min
Dielectric Withstanding
Voltage:AC1,000V per minute

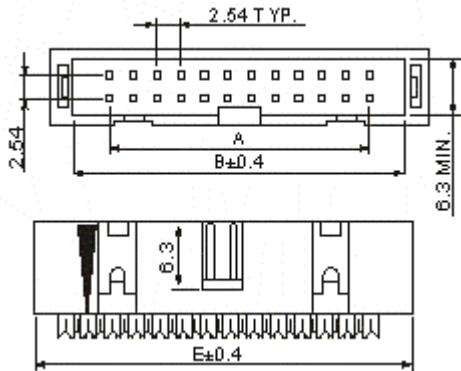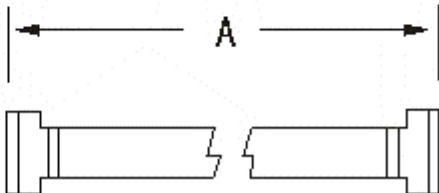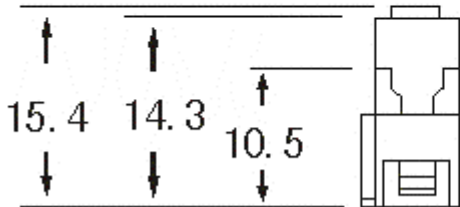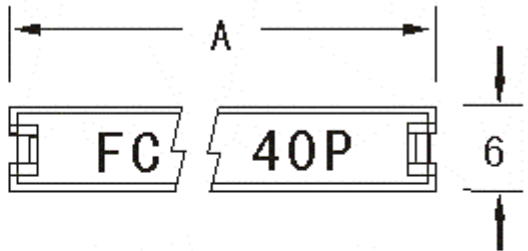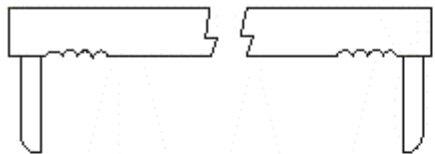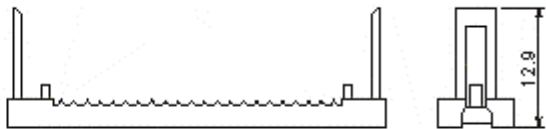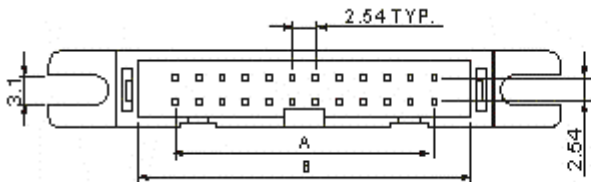

PIN	A	B	C	D	E
10	10.16	18.00	22.90	37.20	23.00
14	15.24	23.08	27.98	42.28	28.08
16	17.78	25.62	30.52	44.82	30.62
20	22.86	30.70	35.60	49.90	35.70
24	27.94	35.78	40.68	54.98	40.78
26	30.48	38.32	43.22	57.52	43.32
30	35.56	43.40	48.30	62.60	48.40
34	40.64	48.48	53.38	67.68	53.48
40	48.26	56.10	61.00	75.30	61.10
50	60.96	68.80	73.70	88.00	73.80
60	73.66	81.50	86.40	100.70	86.50
64	78.74	86.58	91.48	105.78	91.58

Ordering Information

Series No.	No. of Contacts	Screw Hole	Strain Relief	Contact Plating	Housing Color	Wies on Logo
D61015	34	M	N	F1	G	W
	10 30	M:w/ N:w/o	M:w/ N:w/o	F1:Gold Flash	G:Gray	W:w/Logo N:w/oLogo
	14 34			(Please contact us for other plating thickness)		
	16 40					
	20 50					
	24 60					
	26 64					