

DS1016 SERIES





MATERIAL

Insulator:Thermoplastic {UL 94V-0}
Color:See ordering Information
Contact:Copper Alloy
Contact Plated:See ordering information
Shell:Copper Alloy

SPECIFICATION

Storage Temperature:-20-70℃
Operating Temperature:0-85℃
Contact Resistance:20m Ω max.(initial)
Insulation Resistance:1,000M Ω min
Dielectric Withstanding
Voltage:AC1,000V per minute

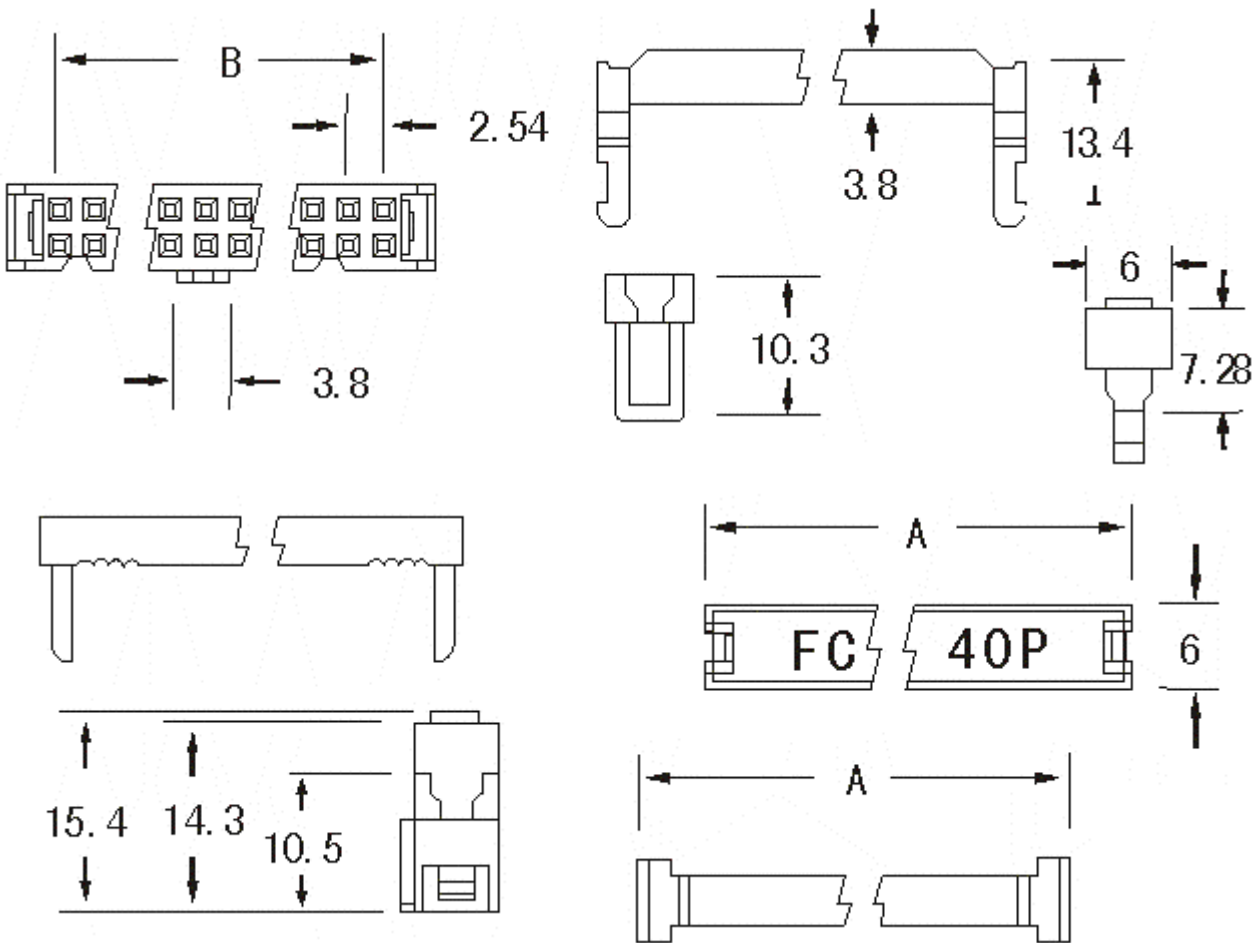

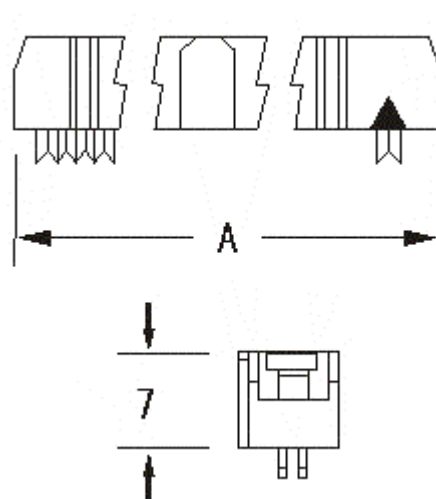

Position	Dimension	
	A	B
10	17.27	10.16
14	22.35	15.24
16	24.89	17.78
20	29.97	22.86
24	35.05	27.94
26	37.59	30.48
30	42.67	35.56
34	47.75	40.64
40	55.37	48.26
50	68.07	60.96
60	80.77	73.66
64	85.85	78.74

Ordering Information

Series No.	No. of Contacts	Strain Relief	Polarization	Contact Plating	Terminal Material	Housing Color
D61016	34	M	A	S1	B	B
	10 34 14 40 16 50 20 60 26 64 30	M: w/ N: w/o	A: w/ B: w/o	S1: Gold Flash (Please contact us for other plating thickness)	B: Brass	B: Black G: Gray