


DS1017 SERIES

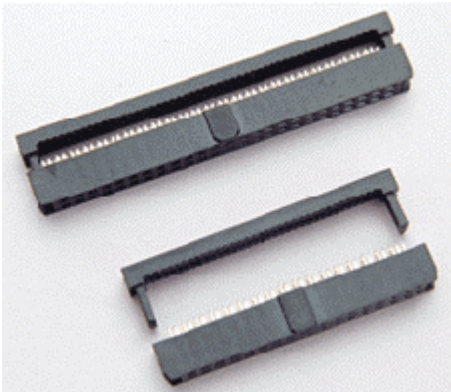


MATERIAL

Insulator:Thermoplastic {UL 94V-0}
Color:See ordering Information
Contact:Copper Alloy
Contact Plated:See ordering information
Shell:Copper Alloy

SPECIFICATION

Storage Temperature:-20-70℃
Operating Temperature:0-85℃
Contact Resistance:20m Ω max.(initial)
Insulation Resistance:1,000M Ω min
Dielectric Withstanding Voltage:AC1,000V per minute

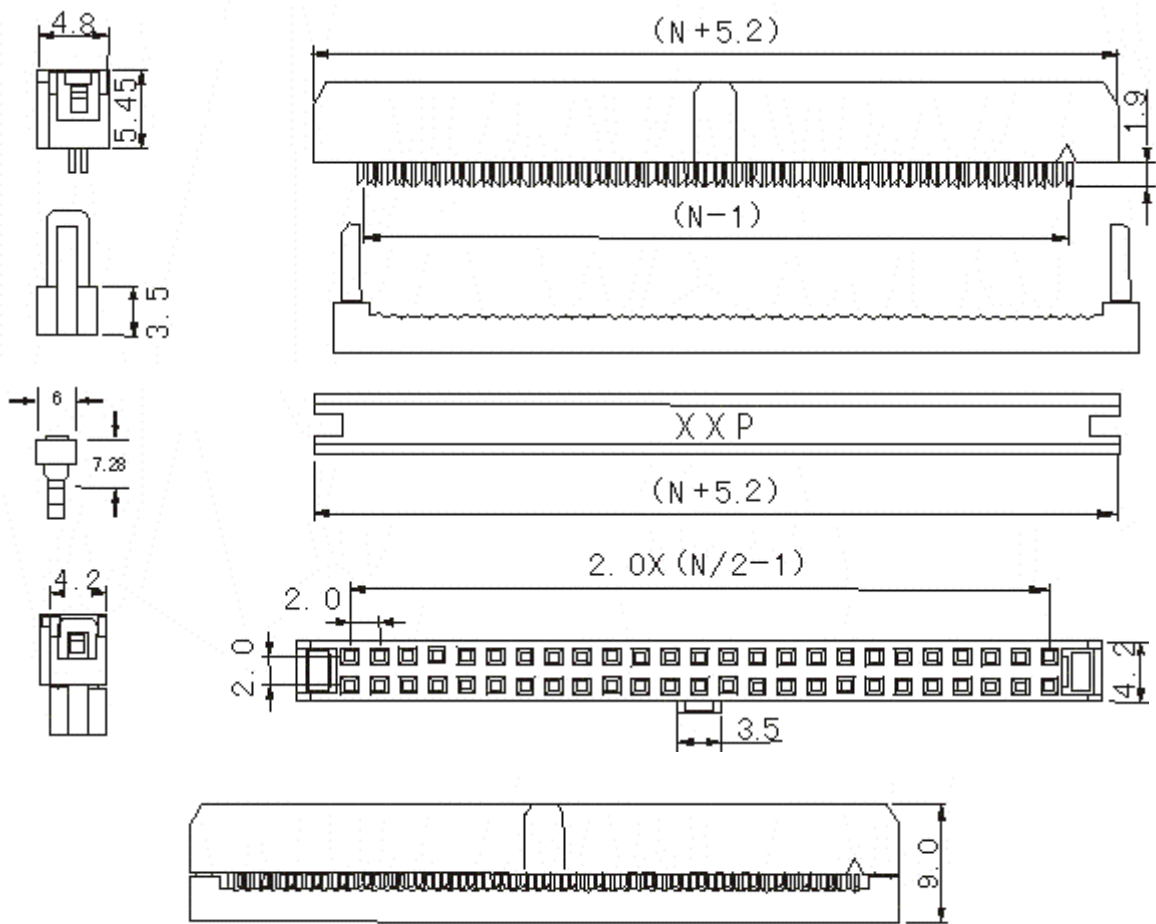

Ordering Information

Series No.
D61017

No. of
Contacts
34
10 34
12 36
16 40
20 44
22 50
24 56
26 68

Strain
Relief
M
M:w/
N:w/o

Polarization
A
A:w/
B:w/o