


DS1031 SERIES

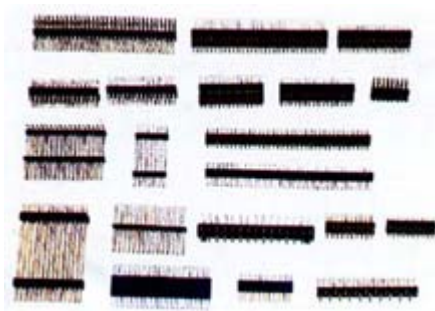

MATERIAL

Contact Material: Copper Alloy

Contact Plating: Gold/Tin over Nickel

Insulator: Filled Polyester (UL94V-0)

SPECIFICATION


Current Rating: 1.5 Amp

Insulation Resistance: 1000MΩ




Dielectric With standing: 600VAC

Contact Resistance: 20mΩ Max.



Operating Temperature: -40℃ to +105℃

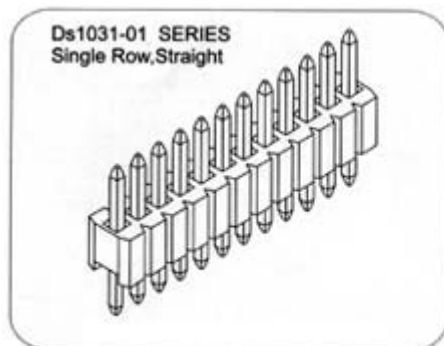



Ds1031-01 SERIES
Single Row, Straight

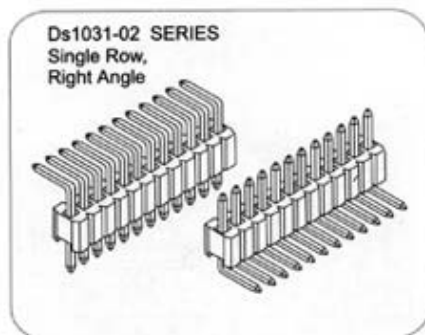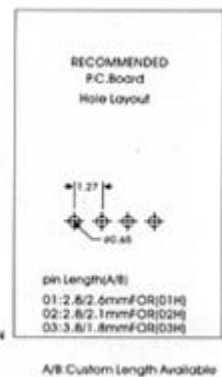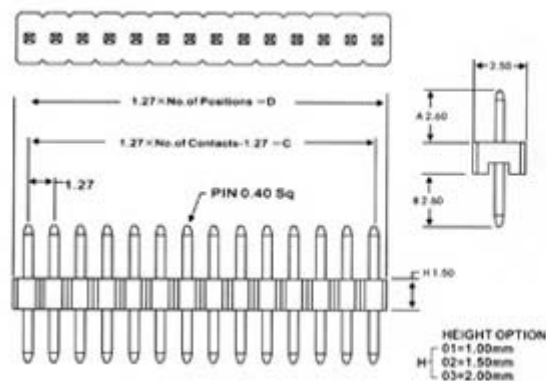



Ds1031-02 SERIES
Single Row, Right Angle

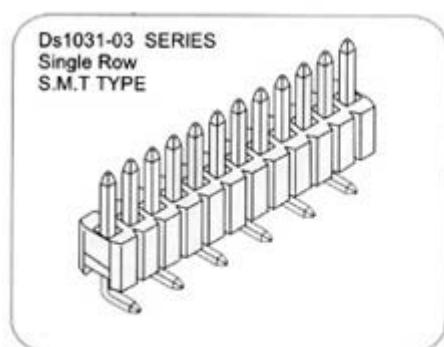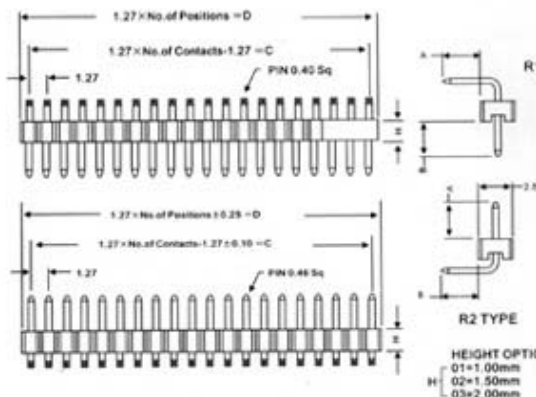


Ds1031-03 SERIES
Single Row S.M.T TYPE

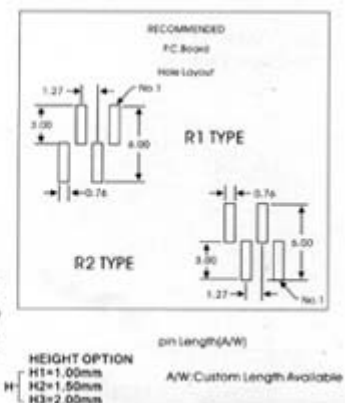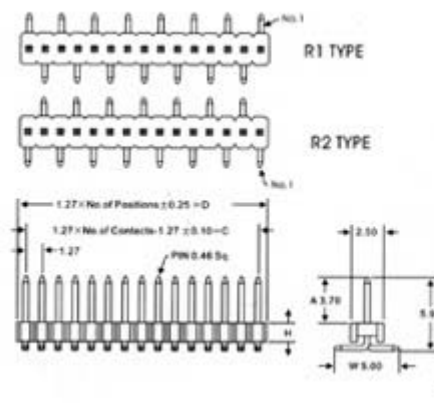

Ds1031-04 SERIES
Board Spacer
Single Row

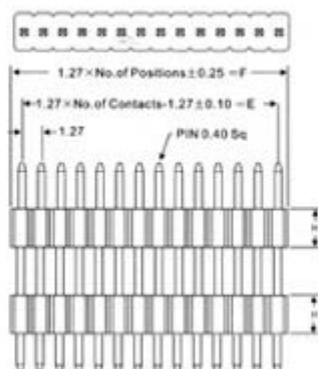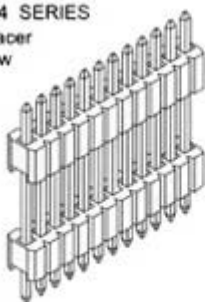



HEIGHT OPTION
H1=1.00mm
H2=1.50mm
H3=2.00mm
H4=Different Height For
The Dual Plastic
Base

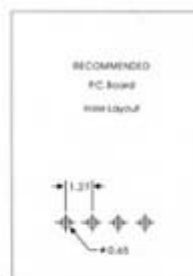


pin Length(A/B)

A/C/B Custom Length Available

Ds1031-05 SERIES
Board Spacer
Single Row
S.M.T

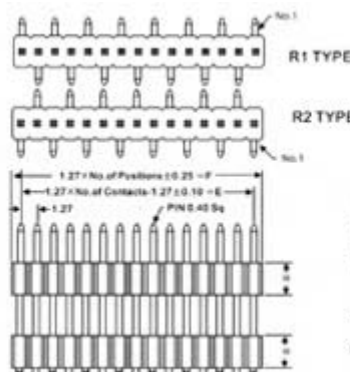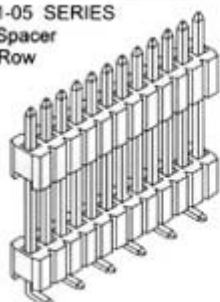



HEIGHT OPTION
H1=1.00mm
H2=1.50mm
H3=2.00mm
H4=Different Height For
The Dual Plastic
Base

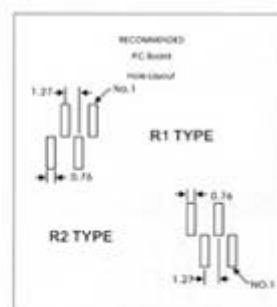

pin Length(A/B)

A/C/W Custom Length Available

Ds1031-06 SERIES
Dual Row
Straight

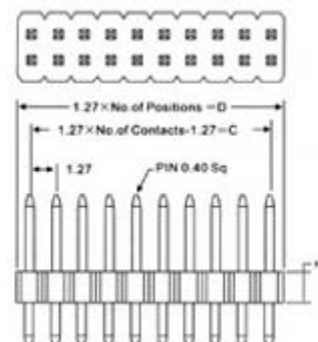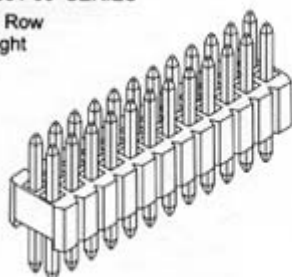



HEIGHT OPTION
H1=1.00mm
H2=1.50mm
H3=1.70mm
H4=2.00mm




pin Length(A/B)

A/B Custom Length Available

Ds1031-07 SERIES
Dual Row
Right Angle

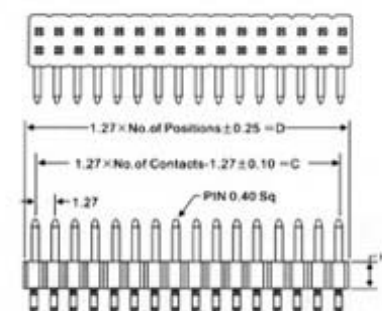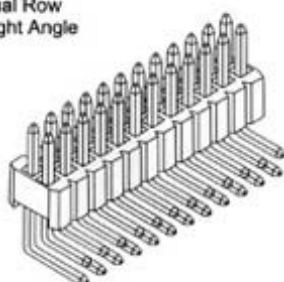




HEIGHT OPTION
H1=1.00mm
H2=1.50mm
H3=1.70mm
H4=2.00mm

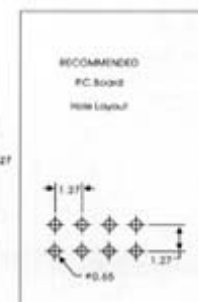


pin Length(A/C/B)

A/B Custom Length Available

Ds1031-08 SERIES
Dual Row
S.M.T TYPE


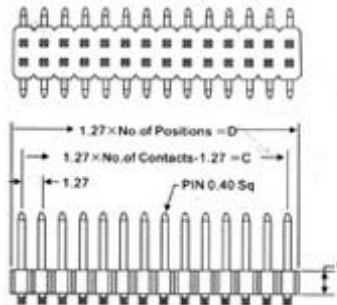
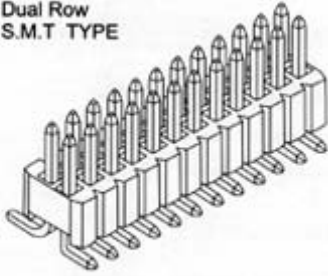


HEIGHT OPTION
H1=1.00mm
H2=1.50mm
H3=1.70mm
H4=2.00mm

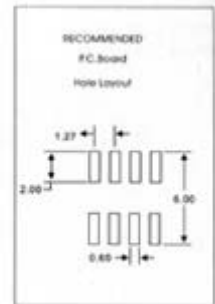


pin Length(A/C/W)
A/W Custom Length Available

Ds1031-09 SERIES
Dual Row, S.M.T Type,
With Local Peg


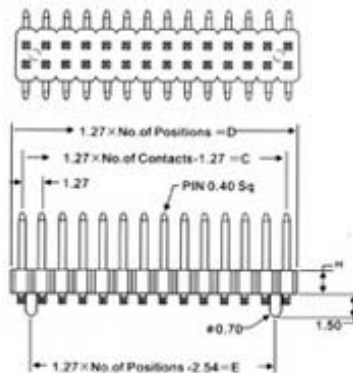
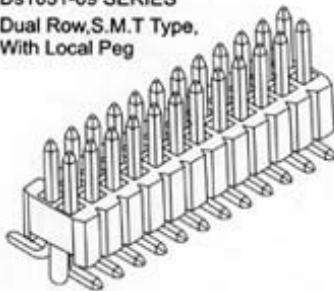


HEIGHT OPTION
H1=1.00mm
H2=1.50mm
H3=1.70mm
H4=2.00mm

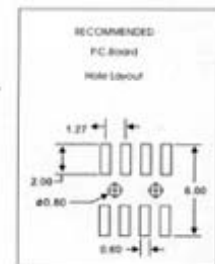


pin Length(A/C/W)
A/W Custom Length Available

Ds1031-10 SERIES
Dual Row, SMT

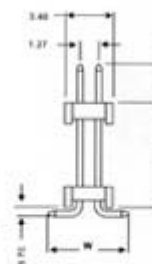
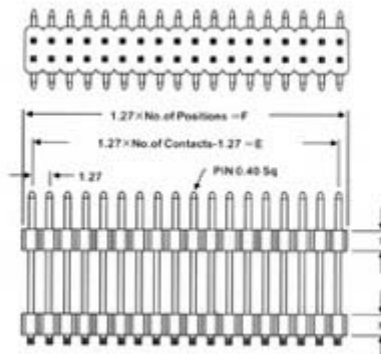
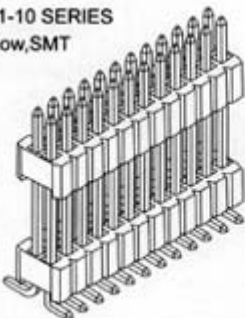


HEIGHT OPTION
H1=1.00mm
H2=1.50mm
H3=1.70mm
H4=2.00mm
H5= Different Height For
The Dual Plastic
Base




pin Length(A/C/W)
A/C/W Custom Length Available

Ds1031-11 SERIES
Dual Row

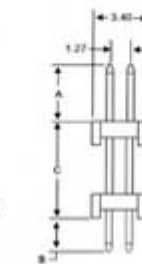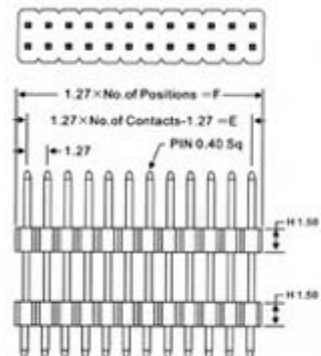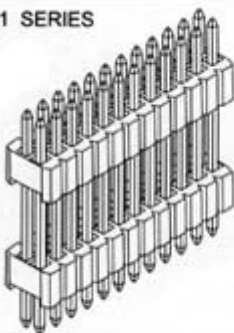

HEIGHT OPTION
H1=1.00mm
H2=1.50mm
H3=1.70mm
H4=2.00mm
H5= Different Height For
The Dual Plastic
Base

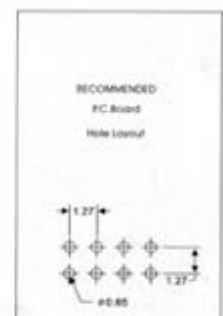

pin Length(A/C/W)
A/C/B Custom Length Available