


DS1023 SERIES

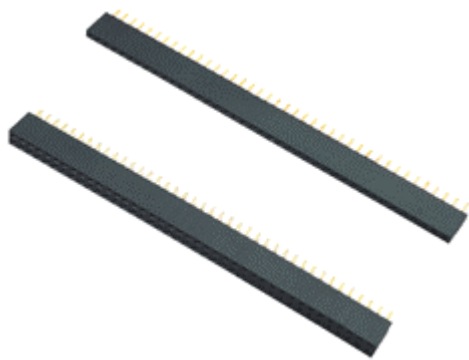

MATERIAL

Insulator:Thermoplastic {UL 94V-0}

Contact:Copper Alloy

Contact Plated:See ordering information

SPECIFICATION

Storage Temperature:-20-70℃


Operating Temperature:0-85℃

Contact Resistance:20m Ω max.(initial)

Insulation Resistance:1,000M Ω min

Dielectric Withstanding

Voltage:AC1,000V per minute

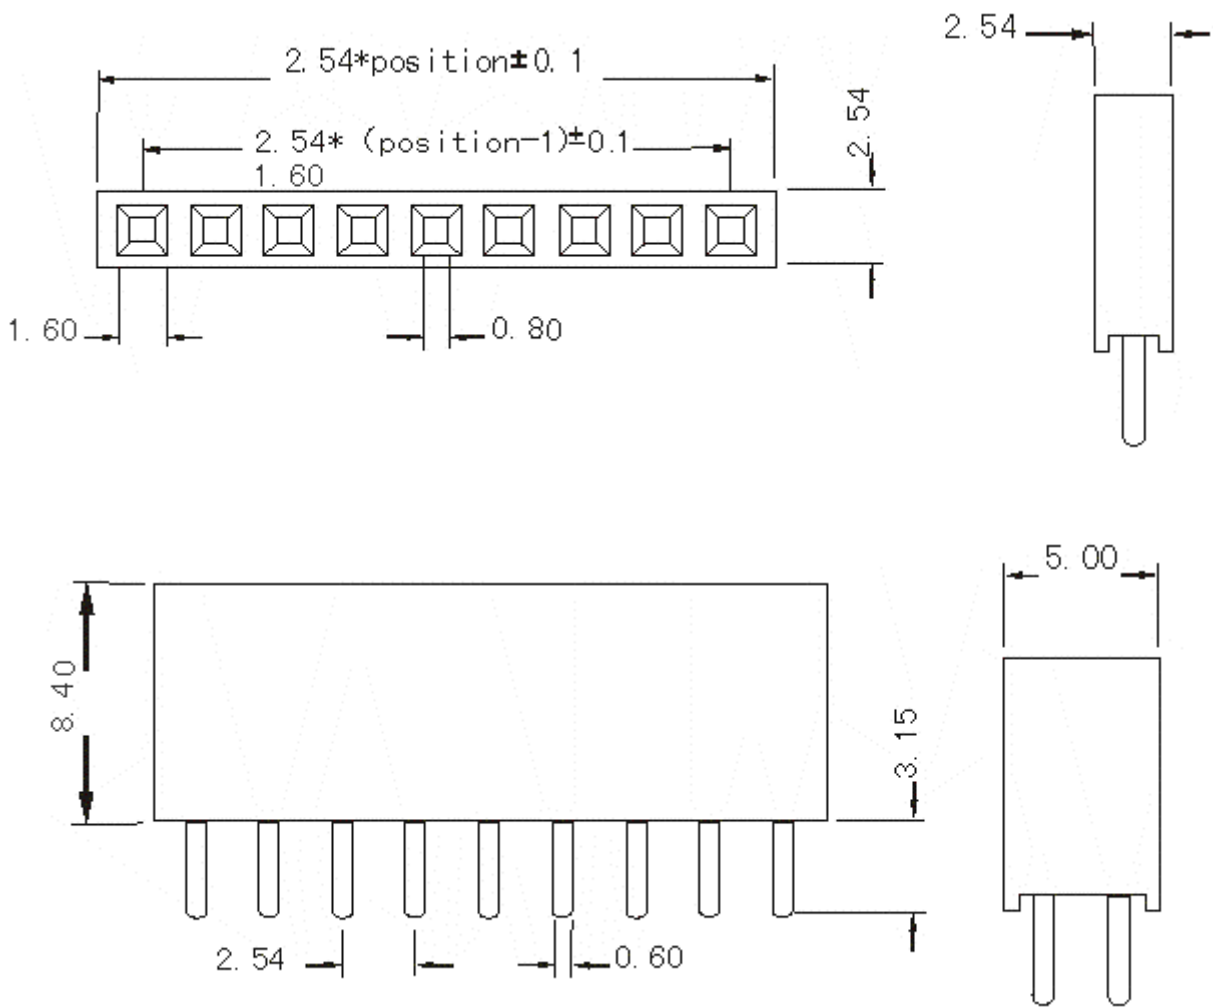

Ordering Information

Series No.
DS1023

No. of
Contacts
2*17
1 Row 1*2-1*40
2 Rows 2*2-2*40

Mounting
Type
A
S: Straight
A: Single Side
B: Double Side

Contact
Plating
F1
F1: Gold Flash
(Please contact us for
other plating thickness)