


DS1032 SERIES

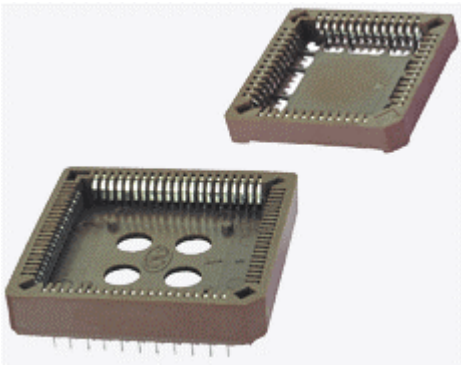


MATERIAL

Insulator:Thermoplastic {UL 94V-0}
Color:See ordering Information
Contact:Copper Alloy
Contact Plated:See ordering information

SPECIFICATION

Storage Temperature:-20-70℃
Operating Temperature:0-85℃
Contact Resistance:20m Ω max.(initial)
Insulation Resistance:1,000M Ω min
Dielectric Withstanding Voltage:AC1,000V per minute

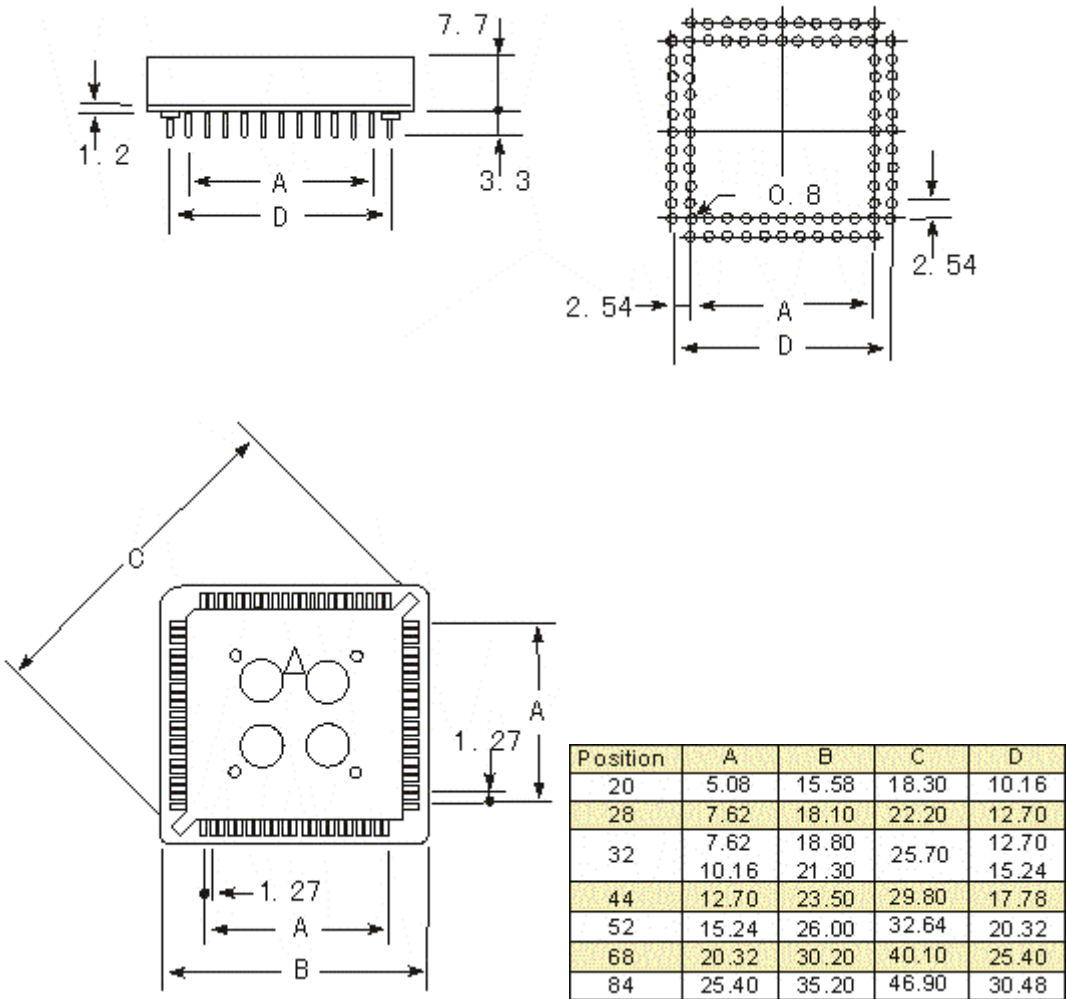

Ordering Information

Series No.
DS1032

No.of
Contacts
34
20 52
28 68
32 84
44

Housing
Material
S
S:PPS

Peg Type
N
M:w/peg
N:w/o peg