


DS1033 SERIES

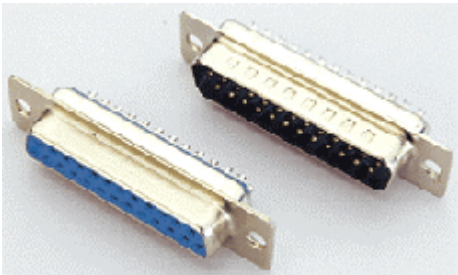


MATERIAL

Insulator:Thermoplastic {UL 94V-0}
Color:See ordering information
Contact:Copper Alloy
Contact Plated:See ordering information
Shell:Copper Alloy

SPECIFICATION

Storage Temperature:-20-70℃
Operating Temperature:0-85℃
Contact Resistance:20m Ω max.(initial)
Insulation Resistance:1,000M Ω min
Dielectric Withstanding Voltage:AC1,000V per minute

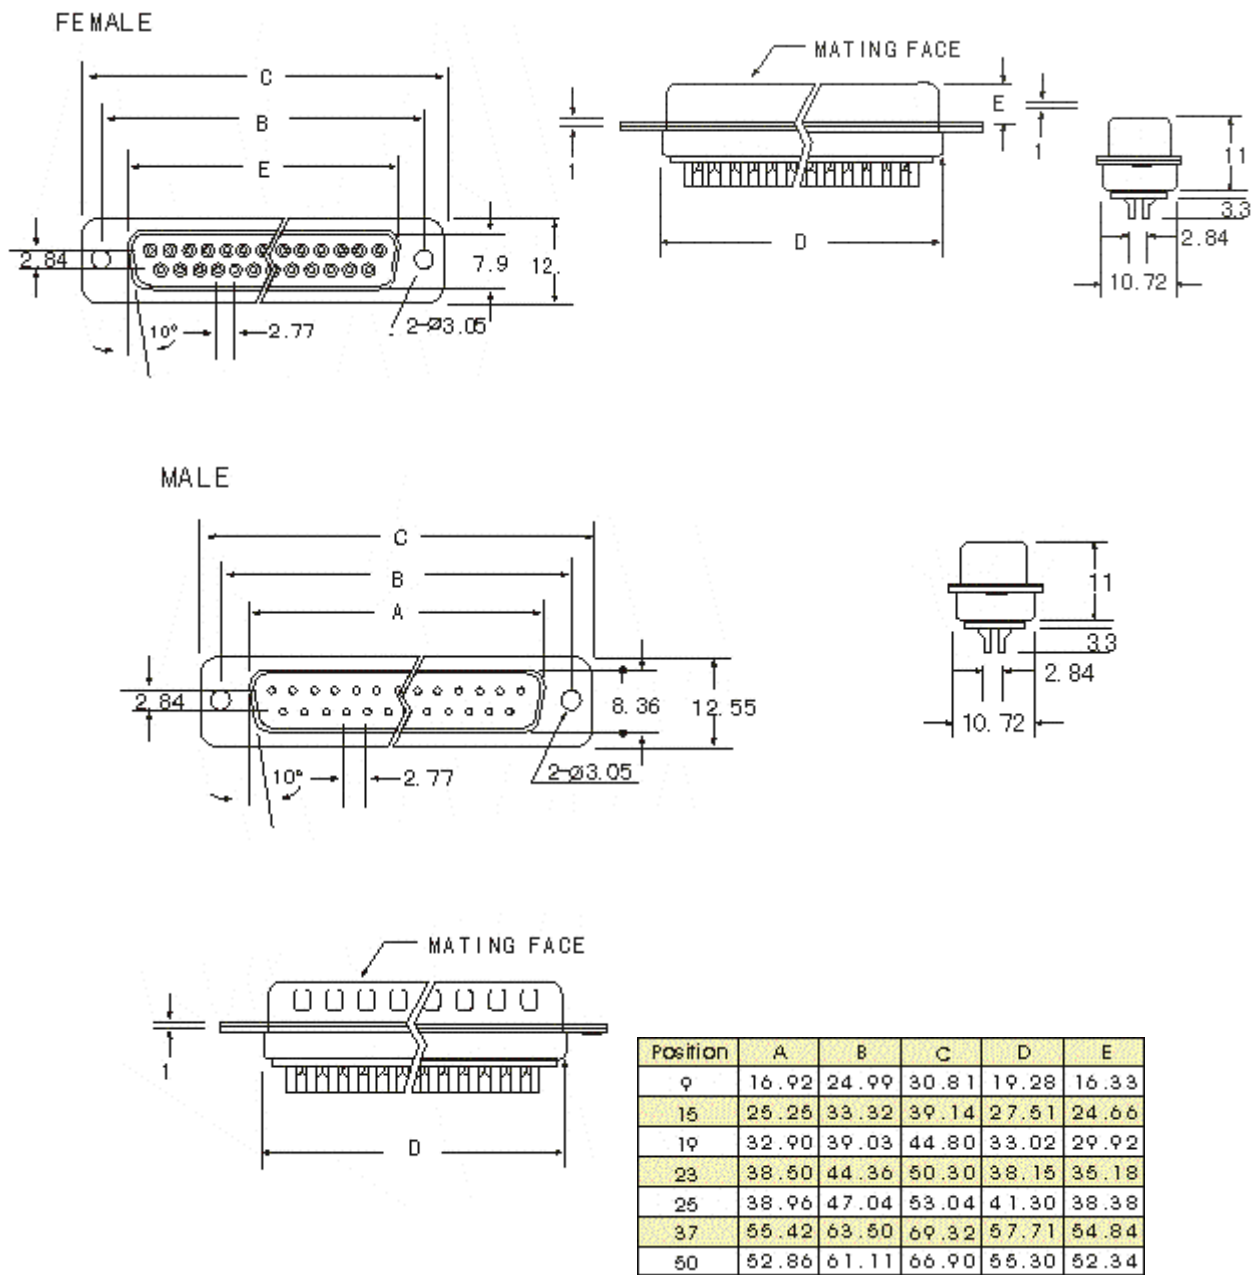

Ordering Information

Series No.

DS1033

No. of
Contacts

25

09
15
19
23
25
37
50

Contact
Type

M

M: Male
F: Female

Housing
Color

B

B: Black
W: White
U: Blue
G: Gray

Shell
Plating

N

T: Tin
N: Nickel

Contact
Plating

S1

S1: Gold Flash
(Please contact us for
other plating thickness)

Nut Type

X

X: w/o Nut