


DS1034 SERIES

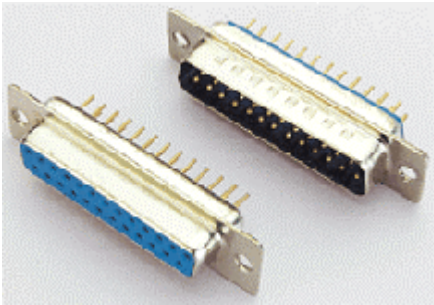

MATERIAL

Insulator:Thermoplastic {UL 94V-0}

Contact:Copper Alloy

Contact Plated:See ordering information

SPECIFICATION

Storage Temperature:-20-70℃


Operating Temperature:0-85℃

Contact Resistance:20m Ω  
max.(initial)

Insulation Resistance:1,000M Ω min

Dielectric Withstanding

Voltage:AC1,000V per minute

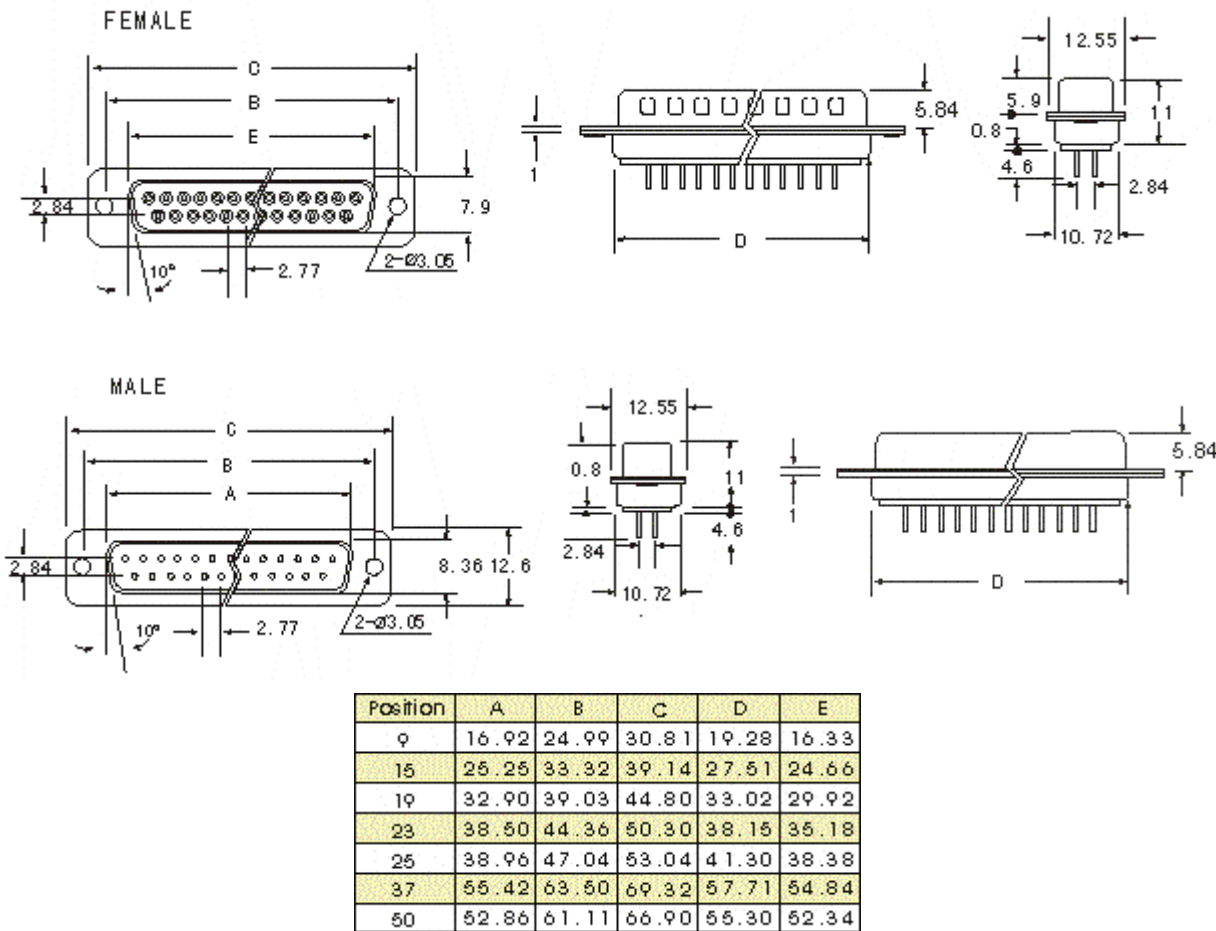

Ordering Information

Series No.  
D61034

No. of  
Contacts  
09

09  
15  
19  
23  
25  
37  
50

Contact  
Type  
M

M:Male  
F:Female

Insulator Color  
B

B:Black  
W:White  
C:Blue

Nut Type  
X

X:w/o nut

Shell  
Plating  
N

T: Tin  
N: Nickel

Contact  
Plating  
S1

S1: Gold Flash  
(Please contact us for  
other plating thickness)

Nut Type  
X

X:w/o Nut