


DS1035 SERIES

MATERIAL

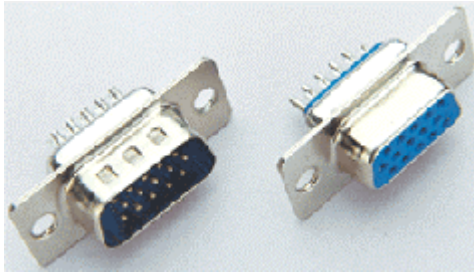

Insulator: Thermoplastic {UL 94V-0}

Contact: Copper Alloy

Contact Plated: See ordering information

SPECIFICATION

Storage Temperature: -20-70°C

Operating Temperature: 0-85°C

Contact Resistance: 20mΩ


max.(initial)

Insulation Resistance: 1,000MΩ

min

Dielectric Withstanding

Voltage: AC1,000V per minute

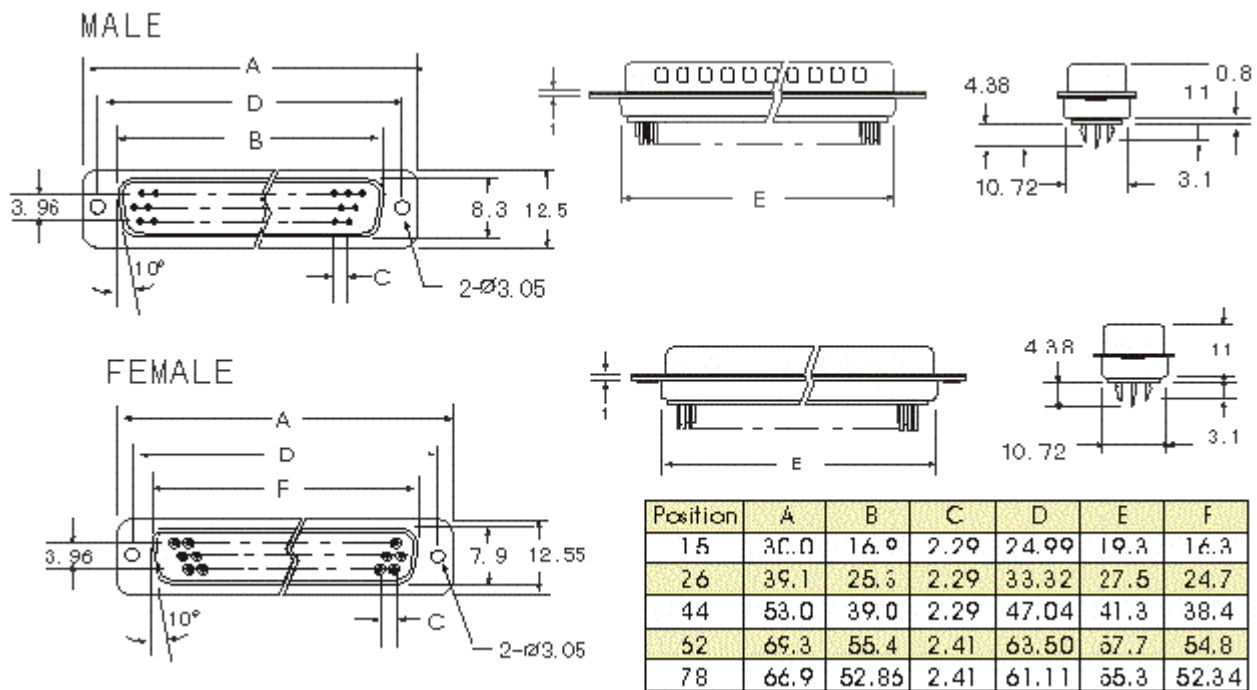

Ordering Information

Series No.	No. of Contacts	Contact Type	Housing Color	Contact	Shell Plating	Contact Plating
DS1035	15	M	B	S	N	S1
	15	M: Male	B: Black	S: Stamped pin	T: Tin	S1: Gold Flash
	26	F: Female	W: White	M: Machined pin	N: Nickel	(Please contact us for other plating thickness)
	44		U: Blue			
	62		C: Blue (P C99)			
	78					