


DS1037 SERIES


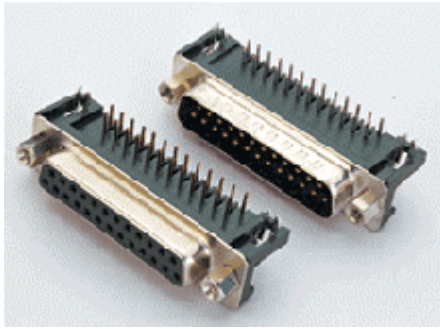


MATERIAL

Insulator: Thermoplastic {UL 94V-0}
 Color: see ordering information
 Contact: Copper Alloy
 Contact Plated: See ordering information
 Shell: Copper Alloy

SPECIFICATION

Storage Temperature: -20-70°C
 Operating Temperature: 0-85°C
 Contact Resistance: 20mΩ max.(initial)
 Insulation Resistance: 1,000MΩ min
 Dielectric Withstanding
 Voltage: AC1,000V per minute

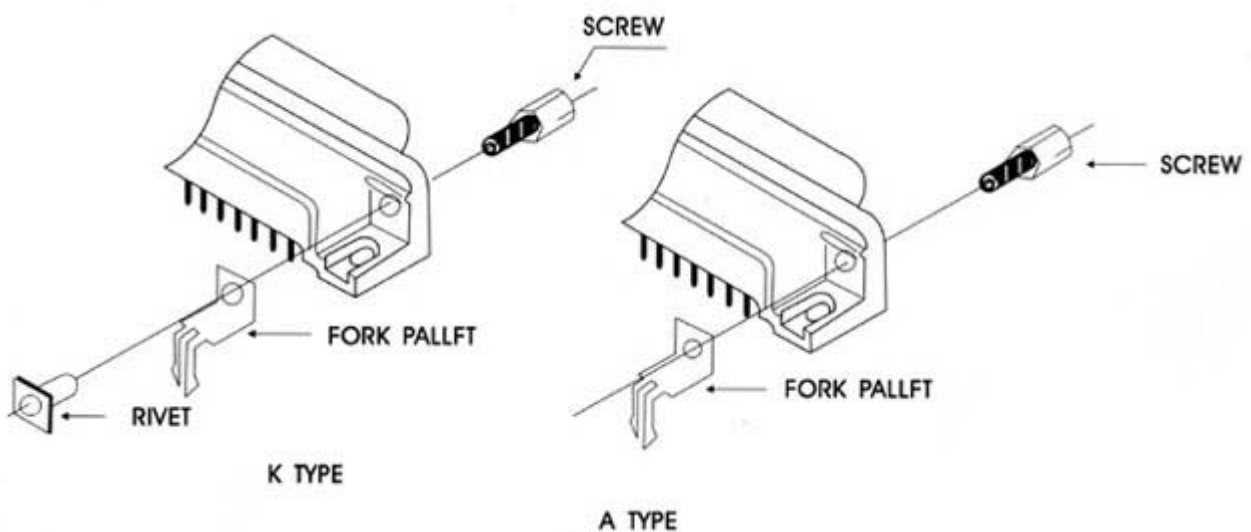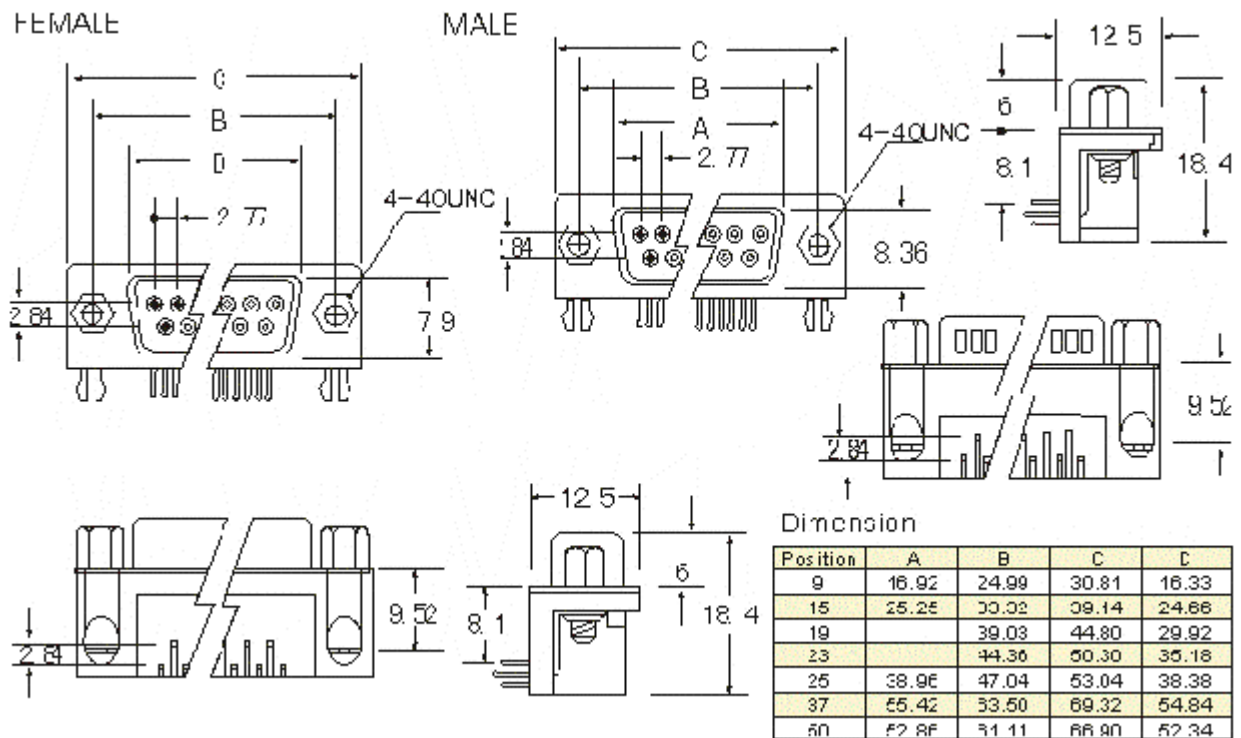

Ordering Information

Series No.	No. of Contacts	Contact Type	Shell Plated	Pin Type	Option on screw	Option on insulator
D51037	09	M	C	S	N	B
		M:Male F:Female	C:Chromated shell T:Tin shell	S:Stamped pin M:Machined pin	N:w/o screws Y:With screw(4-40 UNC)	B:Blue K:Black W:White