


DS1038 SERIES

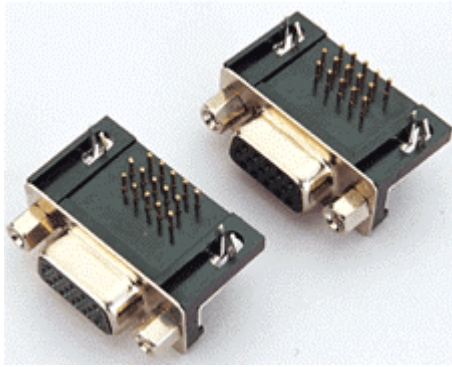

MATERIAL

Insulator: Thermoplastic {UL 94V-0}

Color: see ordering information

Contact: Copper Alloy

Contact Plated: See ordering information

Shell: Copper Alloy

SPECIFICATION

Storage Temperature: -20-70°C

Operating Temperature: 0-85°C




Contact Resistance: 20m Ω max.(initial)

Insulation Resistance: 1,000M Ω min




Dielectric Withstanding

Voltage: AC1,000V per minute

FFMAI F

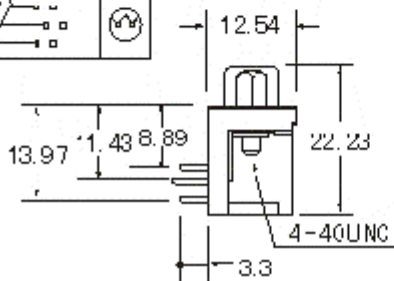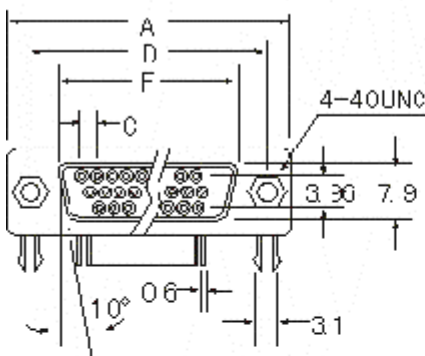

MALE

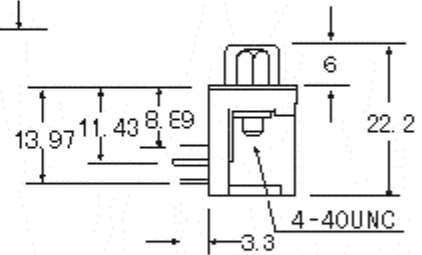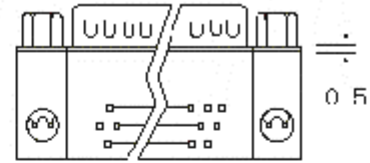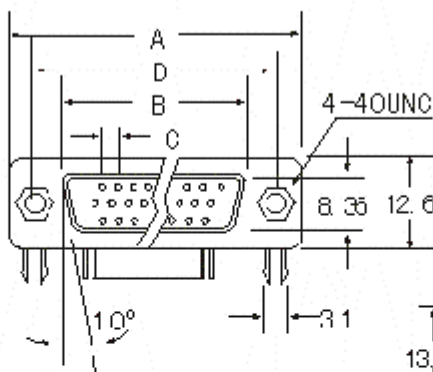

Dimension

Position	Dimension				
	A	B	C	D	E
15	16.3	0.25	2.29	24.99	30.8
26	24.7	0.51	2.29	33.32	39.1
44	38.4	0.51	2.29	47.04	53.0
62	54.8	0.58	2.14	63.50	69.3

Ordering Information

Series No.	No. of Contacts	Contact Type	Housing Color	Shell Plating	Contact Plating	Nut Type
DS1038	25	M	B	N	S1	X
	15	M: Male	B: Black	T: Tin	Si: Gold Flash	X: w/o Nut
	26	F: Female	W: White	N: Nickel	(Please contact us for other plating thickness)	
	44		U: Blue			
	62		C: Blue(PC99)			