
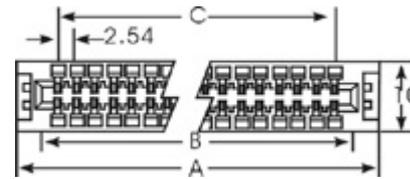


## DS1064 SERIES

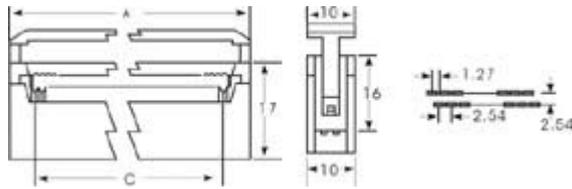

Dimension

Position	A	B	C
20	34.90	28.64	22.86
26	42.50	35.96	30.48
34	52.66	46.12	40.64

### ■ SPECIFICATIONS

◆ Contact Resistance: 30mΩ max. at DC 100mA

◆ Insulator Resistance: 1000mΩ min. at DC 500V

◆ Current Rating: 1AMP

■ DIELECTRIC With standing

◆ Voltage: AC 500V For 1minute

◆ Operating Temperature: -55℃ ~ +105℃

◆ Contact: Phosphor Bronze

◆ Housing: PBT & 30% Glass Fiber (UL94V-0)

### Ordering information

Series No.	NO. OF PINS	Contact plated	OPTION ON STRAIN RELIEF
<b>DS1064</b>	<b>20</b> 20PIN 26PIN 34PIN	<b>T</b> T: TIN PLATED ON TERMINAL & GOLD PLATED ON CONTACT G: ALL GOLD PLATED	<b>A</b> A: WITH STRAIN RELIEF B: W/O STRAIN RELIEF