

DS1077 SERIES




MATERIAL

- ◆ Insulator: Thermoplastic(UL94V-0)
- ◆ Color: See ordering information
- ◆ Contact: Copper Alloy
- ◆ Contact Plated: See ordering information

SPECIFICATION

- ◆ Storage Temperature: -20-70 °C
- ◆ Operating Temperature: 0-85 °C
- ◆ Contact Resistance: 20mΩmax.(initial)
- ◆ Insulation Resistance: 1,000MΩmin.
- ◆ Dielectric Withstanding Voltage: AC1,000V per minute

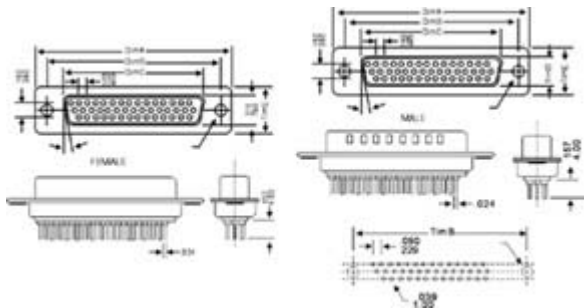

Dimensional Tnformation

Circuite Dim	15	26	44	62	78
.015	1.213	1.541	2.088	2.729	2.635
0.38	30.801	39.14	53.04	69.32	66.93
.005	.984	1.312	1.852	2.500	2.406
0.13	24.99	33.32	47.04	63.50	61.11
.005	.643	.971	1.511	2.159	2.064
0.13	16.33	24.66	38.38	54.84	52.43
.005	.329	.329	.329	.329	.329
0.13	8.36	8.36	8.36	8.36	8.36
.015	.494	.494	.494	.494	.494
0.38	12.55	12.55	12.55	12.55	12.55

Ordering infomation

Series NO	NO.OF CONTACTS	CONTACT	HOUSING COLOR	CONTACT	SHELL PLATING	CONTACT PLATING
Ds1077	15	M	1	S	N	S1
	15	M:Male	B:Black	S:Stamped pin	T:Tin	S1:Gold Flash
	26	F:Female	W:White	M:Machined pin	N:Nickel	(Please contact us for other plating thickness)
	44		U:Blue			
	62					
	78					