

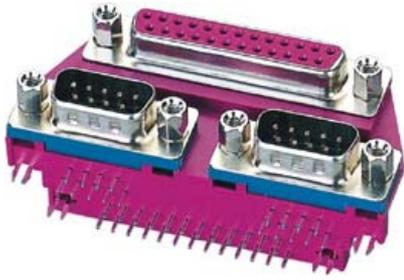



DS1081 SERIES



MATERIAL

- ◆ Contact Resistance: 25mΩ max
- ◆ Insulator Resistance: 5000mΩmin.at DC 500v
- ◆ Rated Current: 3AMP
- Dielectric With standing
- ◆ Voltage: AC 1000V For 1minute
- ◆ Contact: Brass
- ◆ Housing: PBT&30% Glass Fiber(UL94V-0)

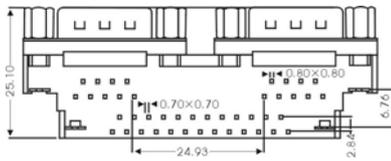

Ordering information

Series No .	COLOR OF HOUSING	SHELL PLATED	Contact plated
Ds1081	W	1	T
	W:WHITE K:BLACK B:BLUE	1:CHROMATED SHELL 2:TIN SHELL	T:TIN PLATED G:GOLD PLATED