

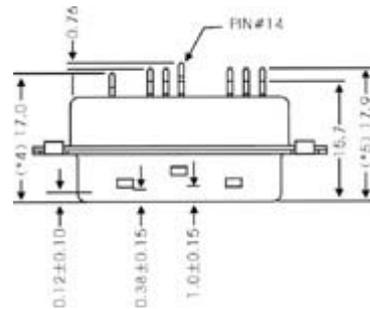
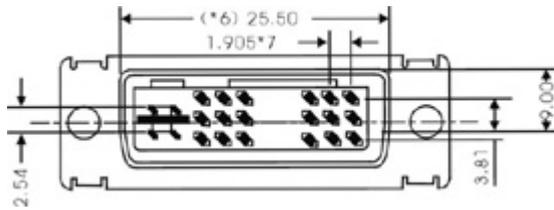


**DS1087 SERIES**



**MATERIAL**

- ◆ Contact Resistance: 25Ωmax
- ◆ Insulator Resistance: 5000MΩmin.at DC 500V
- ◆ Rated current: 3AMP
- Dielectric With standing
- ◆ Voltage: AC 1000V For 1 minute
- ◆ Contact: Brass
- ◆ Housing: PBT&30% Glass Fiber(UL 94V-0)

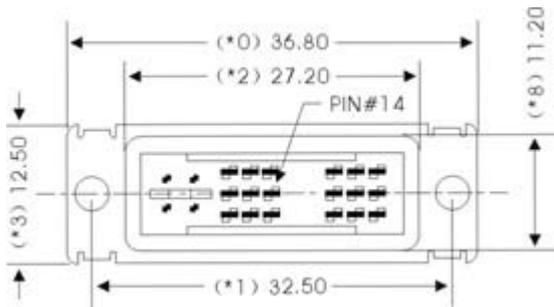

**Ordering information**

SERIES NO.	COLOR OF HOUSING	CONTACT PLATED	SHELL PLATED
<b>DS1087</b>	<b>W</b> W:WHITE K:BLACK B:BLUE	<b>T</b> T:TIN PLATED G:GOLD PLATED	<b>1</b> 1:CHROMATED SHELL 2:TIN SHELL