



DS1088 SERIES

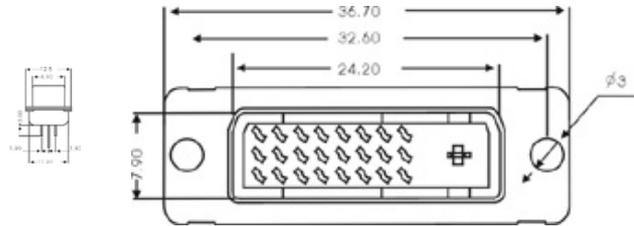

MATERIAL

- ◆ Contact Resistance: 25Ωmax
- ◆ Insulator Resistance: 5000MΩmin.at DC 500V
- ◆ Rated current: 3AMP
- Dielectric With standing
- ◆ Voltage: AC 1000V For 1 minute
- ◆ Contact: Brass
- ◆ Housing: PBT&30% Glass Fiber(UL 94V-0)

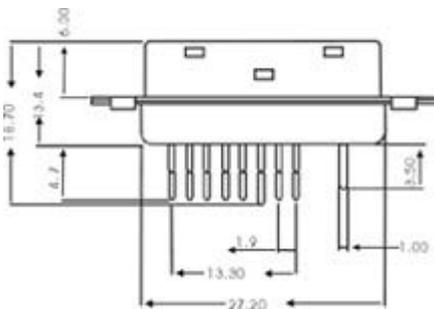

Ordering information

Series No.

Ds1088

Color Of Housing

W

W:WHITE
K:BLACK
B:BLUE

SHELL PLATING

1

1:CHROMATED SHELL
2:TIN SHELL

CONTACT PLATED

T

T:TIN PLATED
G:GOLD PLATED