

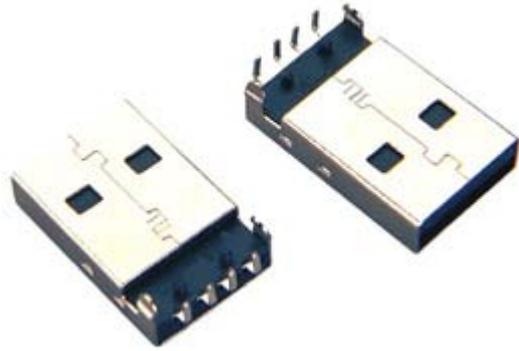


**DS1097 & DS1098 SERIES**

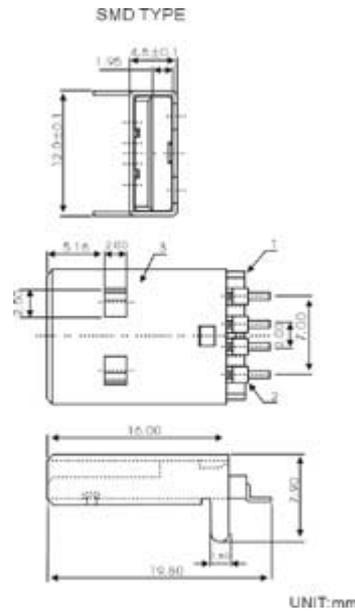

**SPECIFICATION**

- ◆ Contact Resistance:  $2m\Omega$  max
- ◆ Insulator Resistance:  $1000m\Omega$  min. at DC 500V
- ◆ Rated Current: 2AMP
- ◆ Rated Voltage: 30V AC
- DIELECTRIC With standing
- ◆ Voltage: AC 500V For 1minute
- ◆ Contact: Copper Alloy
- ◆ Housing: Thermoplastic(UL94V-0)

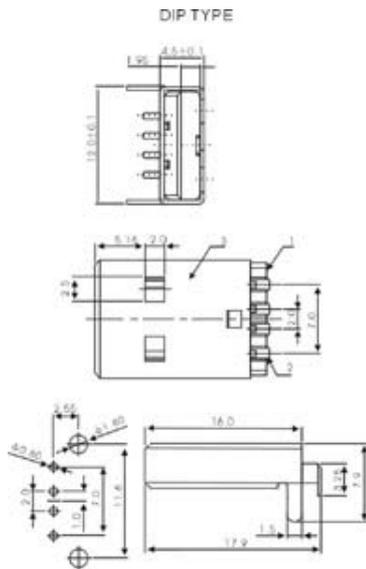

**Ordering information**

Series No .

**Ds1097&Ds1098**

COLOR OF HOUSING

**K**

K:BLACK  
W:WHITE

PLATING

**N**

N:NI  
T:TIN-LEAD

GOLD PLATING

**03**

03:AU3  $\mu$  "  
30:AU30  $\mu$  "