


DS1104 SERIES

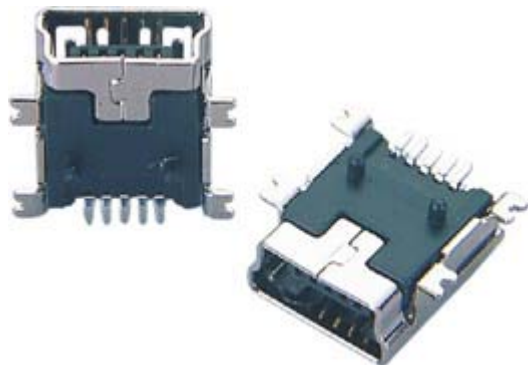

MATERIAL

◆CONTACT : PHOSPHOR BRONZE, GOLD PLATED
FOR CONTACT AREA

◆HOUSING : PBT+30%, UL94V-0

SPECIFICATION

◆CURRENT RATING : 2 A

◆VOLTAGE RATING : 30 VDC/40 VAC MAX

◆CONTACT RESISTANCE : 30 MILLIOHMS MAX

◆INSULATION RESISTANCE : 1000 MEGOHMS MIN



◆DIELECTRIC WITHSTANDING VOLTAGE : 250 VAC
FOR 1 MINUTE

MECHANICAL

◆CONNECTOR MATING FORCE : 2.8 KGF MAX

◆CONNECTOR UNMATING FORCE : 0.6 KGF MIN

◆CONTACT RETENTION FORCE : 0.5 KGF MIN

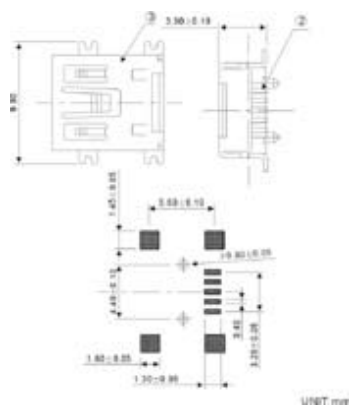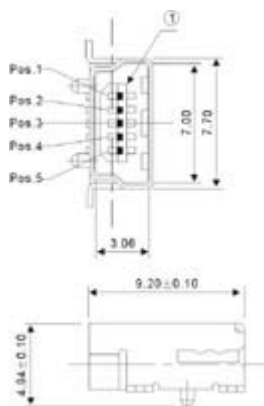

Ordering infomation

Series No .

Ds1104

COLOR OF HOUSING

W

W:White
K:Black

PLATING

1

1:NI
2:TIN-LED

GOLD PLATED

03

03:AU3 μ "
30:AU30 μ "